


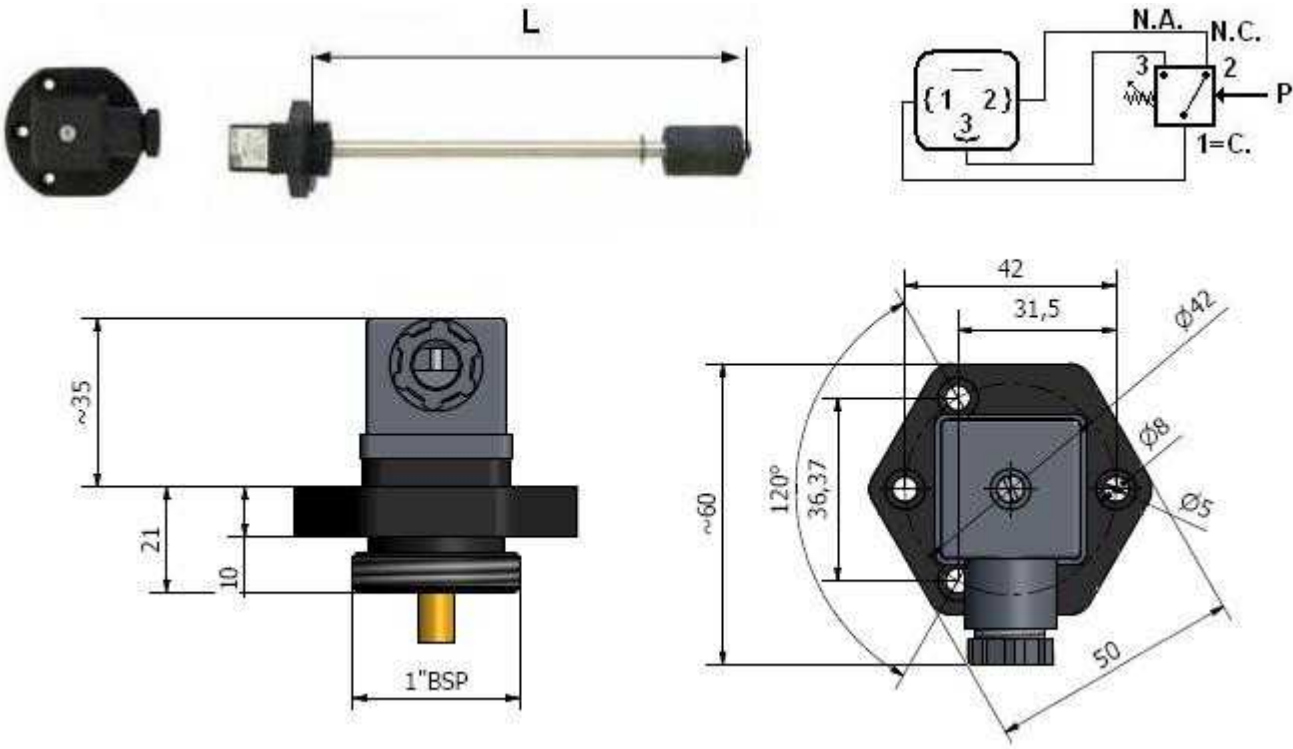

Flange of Fastening Anodized Alluminium

Rod Stainless Steel

Working Temperature -10 °C to + 90°C

Electric Features

- Electric connection according to DIN 43650
- Electric protection according to DIN 40050: IP65
- Electric Reed contacts in exchange

Maximum Load on the Electric Contacts

- AC < 48 V - 0.5 A
- DC < 48 V - 0.5 A
- 30VAC/VDC - 0.2 A

Installation Must be foreseen at least at 50mm from ferrous walls and far from magnetic fields

Part nº	L (mm)
NE1C150	150
NE1C200	200
NE1C250	250
NE1C300	300
NE1C350	350
NE1C400	400
NE1C500	500