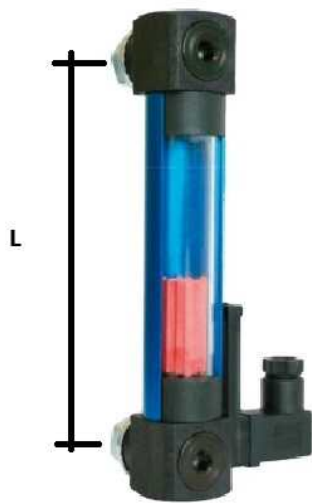


- Maximum Load on the Electric Contacts** · AC up to 48 V - 0.5 A
· DC up to 48 V - 0.5 A
- Screws:** 2 x M12
- Working temperature:** +5°C a 80°C
- Transparent tube:** methacrylate

Part nº	L (mm)
LVSE-2	127
LVSE-3	254

(*)Distance between centers