Tank accessories

Filler breather without filter with valve

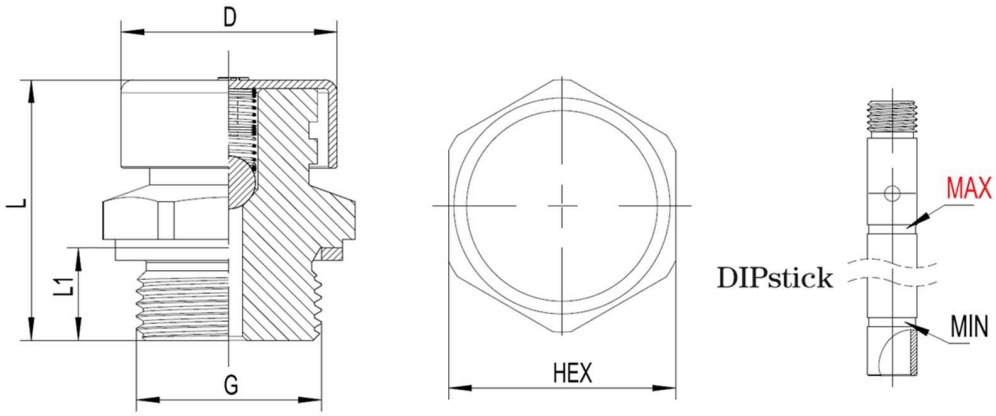

Material	Body-aluminum 6061-t6 mill finished Breather cap – Steel zinc plated Stainless steel ball Stainless spring
Thread gasket	Aluminum A11060 (Sealing Din 7603A)
Working pressure	0.05 bar- 0.35 bar
Maximum continuous working temperature	-40Cº - 250Cº
Technical Characteristics	Breather valve are used when the air exchange is to be allowed between the inside of the container and the ambient air. In its normal state, the SS ball was closed the valves so prevents dirt or dust getting inside the box.

Part nº	R1	L	L1	HEX 1	D
NSFO/R3G	1/2" BSP	31	11	27	26
NSFO/R4G	3/4" BSP	32	11	32	29
NSFO/R5G	1" BSP	39	14	40	38

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.