Compressed air treatment elements

Filters

Filter-pressure reducer + compact lubricant

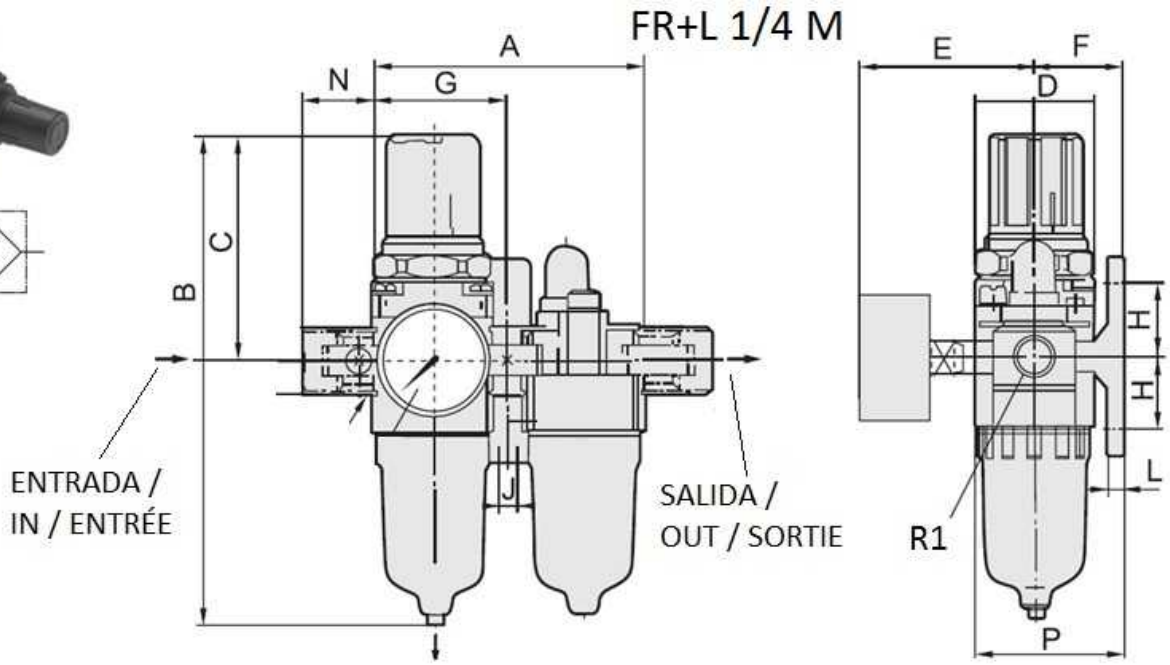

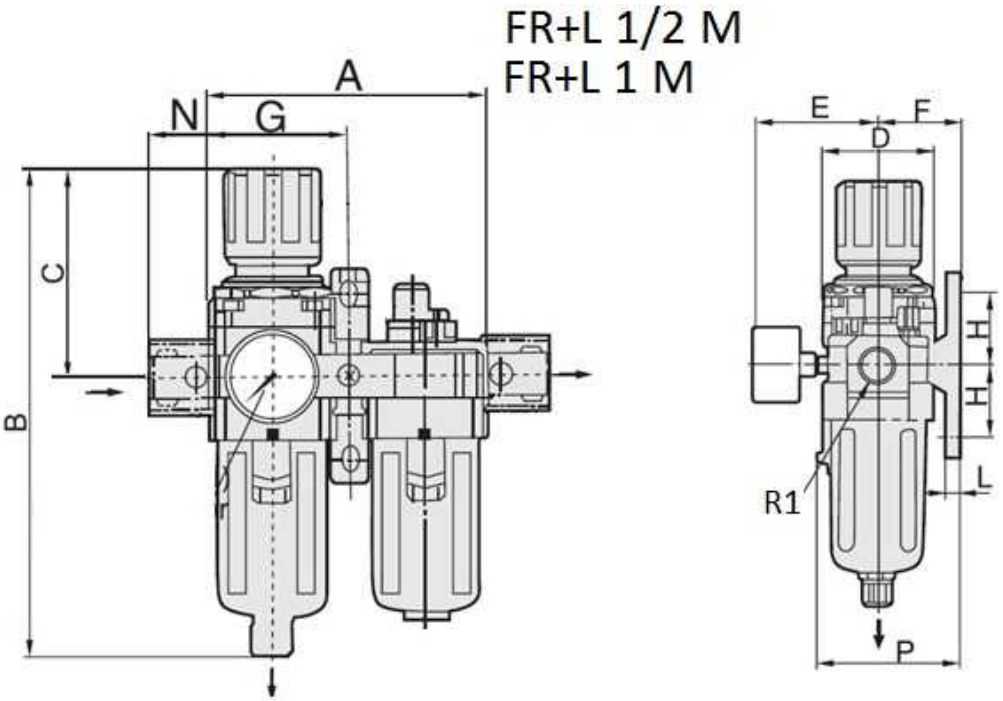

Working temp: 5 - 60 ºC

Filter precission: 25 µm

Pressure gauge included

Drain type: Manual

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

Compressed air treatment elements

Filters

Filter-pressure reducer + compact lubricant

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	A	B	C	D	E	F	G	H	L	N	P
FR+L 1/4 M	1/4" BSP	500	10	90	164,5	78	40	56,8	30	45	24	5	23	50
FR+L 1/2 M	1/2" BSP	3000	10	154	262	112	70	65,5	50	77	40	7	33	88
FR+L 1 M	1" BSP	4000	10	195	338	116	90	75,5	69,8	97,5	50	10,5	40	115

Size 1/4 "gauge with 1/8" BSP thread
Size 1/2 "-1" gauge with 1/4 "BSP thread

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.