


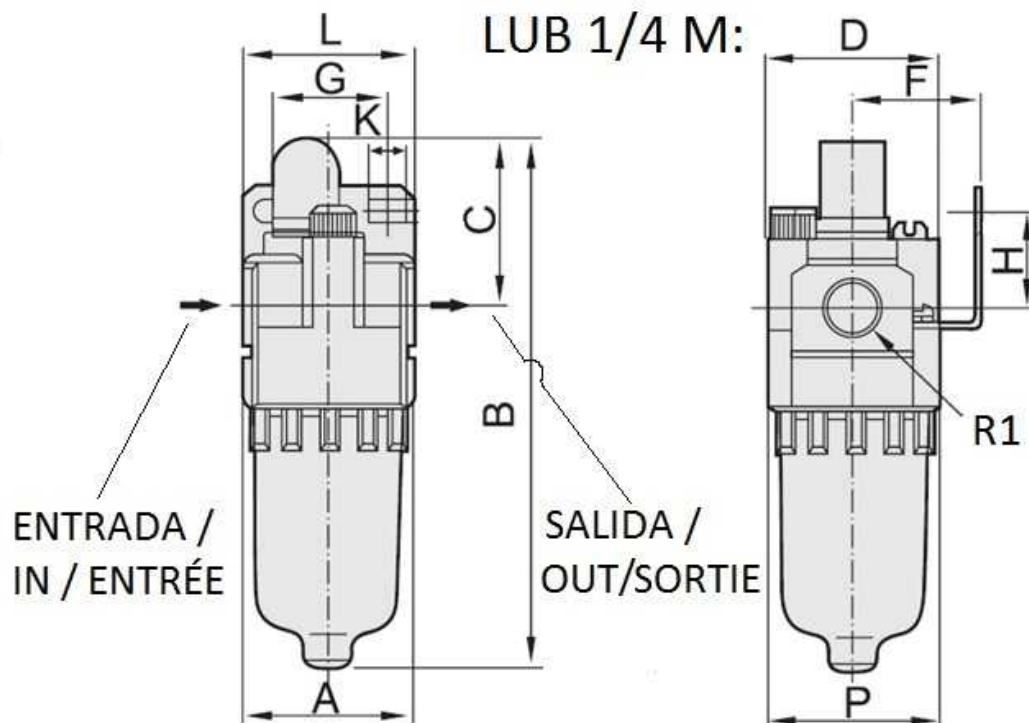


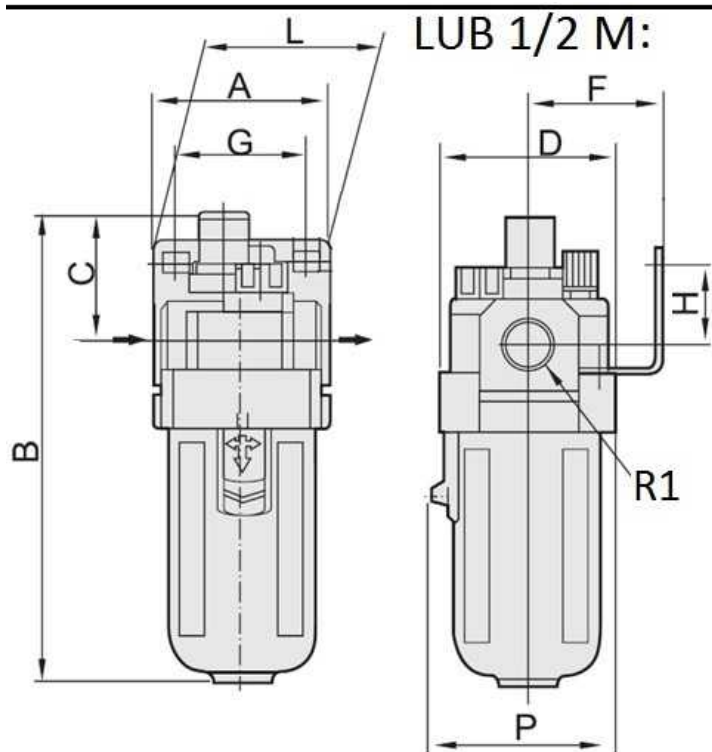

Working temp: 5 - 60 °C

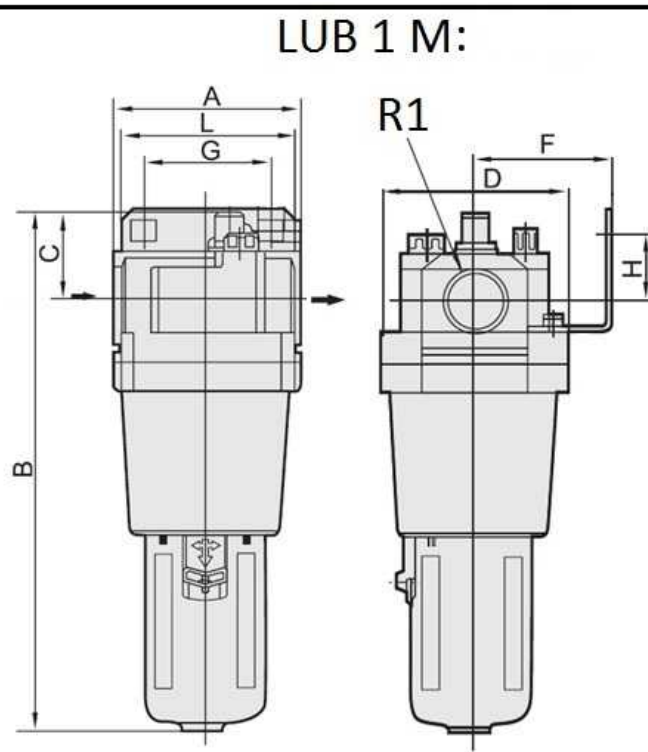

Compressed air treatment elements

Filters

Compact Lubricant

Page: 2/2

Part n°	R1	Max. flow (l/min)	Max. Press. (bar)	A	B	C	D	F	G	H	L	P
LUB 1/4 M	1/4" BSP	800	10	40	122	38	40	30	27	22	40	40
LUB 1/2 M	1/2" BSP	5000	10	70	177	41	70	50	54	26	70	73
LUB 1 M	1" BSP	7000	10	90	254	45	90	66,5	66	35	90	90

1/4 "gauge with 1/8" BSP thread
1/2 "-1" gauge with 1/4 "BSP thread