

Compressed air treatment elements


Filters

Pressure reducer





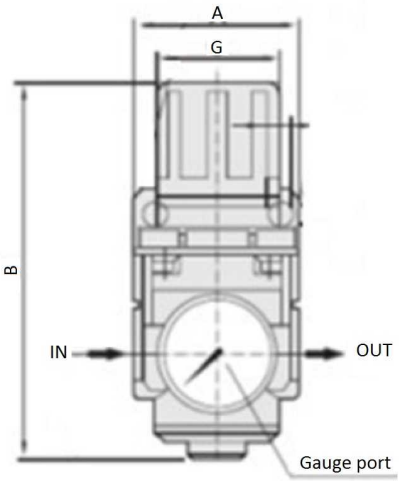

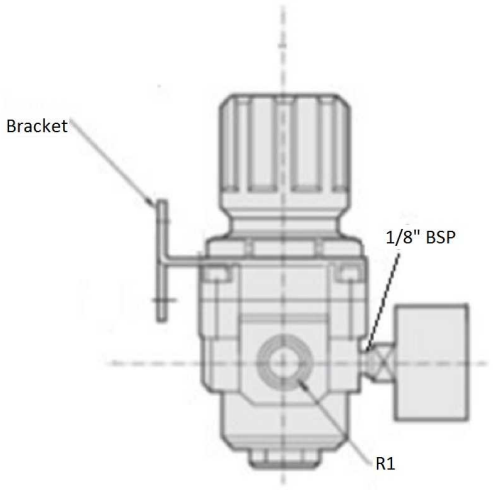

Guaranteed pressure resistance(Bar)	15
Max. working pressure(Bar)	10
Working temperature(℃)	5–60
Pressure adjusting range(Bar)	0.5–8.5

Part nº	R1	Flow (l/min)	Max. Press. (bar)	A	B	G
REG 1/4	1/4" BSP	550	10	40	95	34
REG 1/2	1/2" BSP	6000	10	70	149,5	54
REG 1	1" BSP	8000	10	90	168	54

Supplied with pressure gauge and bracket
Size 1/4 "gauge with 1/8" BSP thread
Size 1/2 "-1" gauge with 1/4 "BSP thread

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.