
Control valves


Manual / Mechanical Actionning


Fixed roller 3/2 monostable normally closed







Working pressure(Bar)	1.5 - 8.0
Guaranteed pressure(Bar)	12
Working temperature(°C)	-5 - 60
Max. acting frequency	5 cycles/s
Port size	G1/8



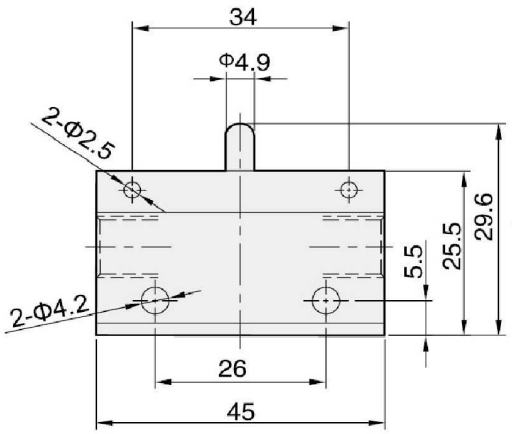

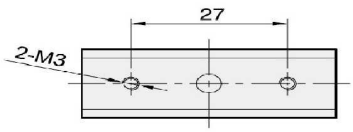



Part nº	R1	Details
NEU100370	1/8" BSP	3/2 Monostable NC

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.