



Flow check and metering excavator valve, 250 l/min






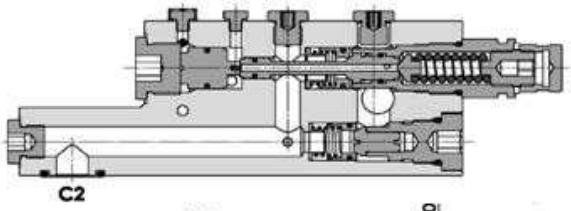

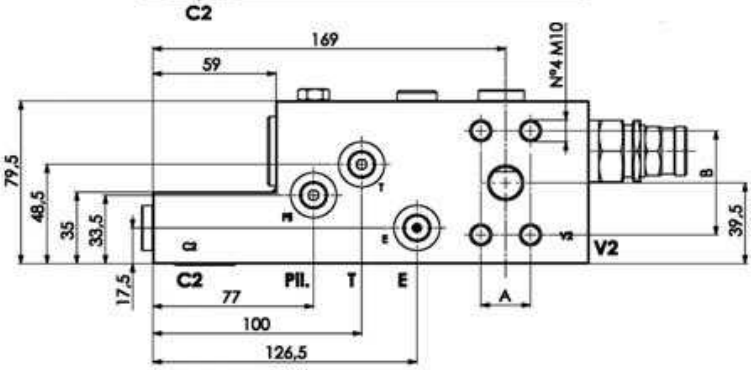

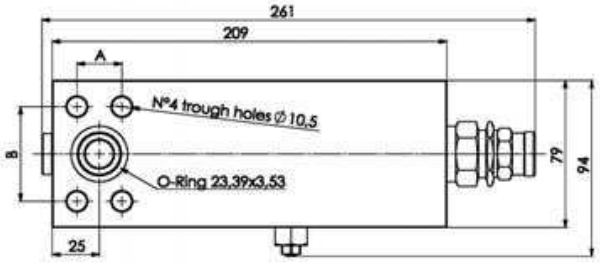

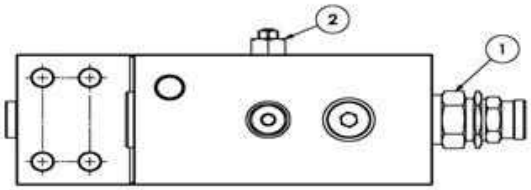

Spring valve 1 Adjustable pressure range (bar): 3,5-19,5
Pressure increase (bar/turn): 3,5
Standard setting (bar): 7,5

Spring valve 2 Adjustable pressure range (bar): 250-500
Pressure increase (bar/turn): 198
Standard setting (bar): 350

Materials: Body is in steel zinc plated. Internal parts are in hardened steel.

Adjustment means: leakproof screw adjustment

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	A	B
FPEXC250S3/41F3000	3/4'' SAE 3000	250	420	22,2	47,6
FPEXC250S3/41F6000	3/4'' SAE 6000	250	420	23,8	50,8

R1=C2, V2

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.