Flow dividers 50% spring operated

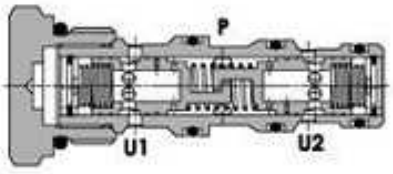



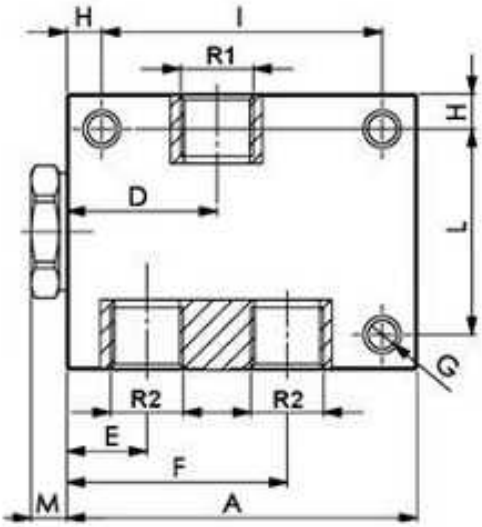



Material: cartridge and body in steel
Max.flow: 150 l/min

Part nº	R1	R2	Flow (l/min)	Max. Press. (bar)	A	B	C	D	E	F	G	H	I	L	M
FPFD S10 CB 3/8 3/8 SA	3/8" BSP	3/8" BSPP	1-5	350	80	35	63	34	18	50	6,5	8	64	47	8
FPFD S10 CB 3/8 3/8 SE	3/8" BSP	3/8" BSPP	5-10	350	80	35	63	34	18	50	6,5	8	64	47	8
FPFD S10 CB 3/8 3/8 SI	3/8" BSP	3/8" BSPP	10-20	350	80	35	63	34	18	50	6,5	8	64	47	8
FPFD S10 CB 1/2-3/8 SM	1/2'' BSP	3/8'' BSPP	20-40	350	80	35	63	34	18	50	6,5	8	64	47	8
FPFD S10 CB 1/2-3/8 SQ	1/2'' BSP	3/8'' BSPP	40-50	350	80	35	63	34	18	50	6,5	8	64	47	8
FPFD S12 CB 1/2 1/2 SA	1/2" BSP	1/2" BSPP	50-75	350	115	40	80	53,3	27,3	78,3	6,5	8	99	64	10,7
FPFD S12 CB 3/4 1/2 SE	3/4" BSP	1/2" BSPP	75-100	350	115	40	80	53,3	27,3	78,3	6,5	8	99	64	10,7
FPFD S16 CB 3/4-3/4 SA	3/4" BSP	3/4" BSPP	80-115	350	125	50	100	54,3	25,8	82,8	8,5	10	105	80	12,7
FPFD S16 CB 1 3/4 SE	1" BSP	3/4" BSPP	115-150	350	125	50	100	54,3	25,8	82,8	8,5	10	105	80	12,7

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.