


FM55+relief valve. Manual operator, return to center by spring





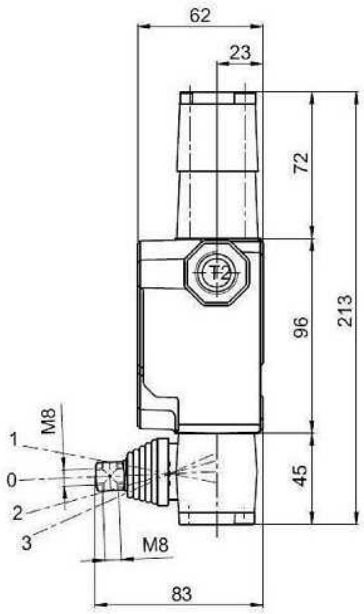

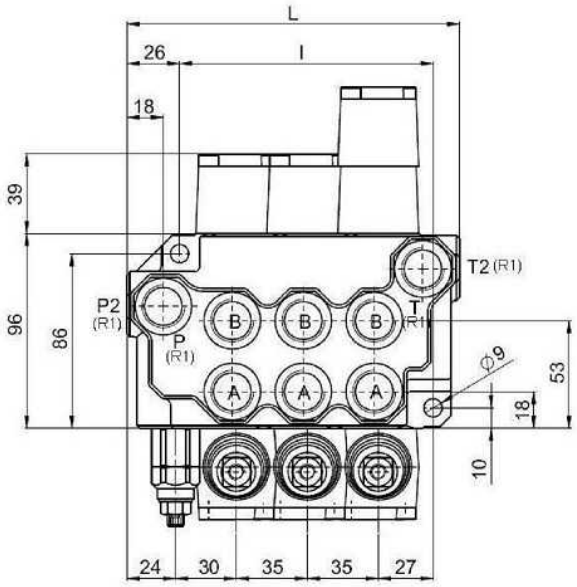

Nominal Flow	50 l/min
Max Flow	70 l/min
Nominal Pressure	280 bar
Max Working Pressure	300 bar
Max Tank-Line Pressure	80 bar
pressure relief valve range	· 100 to 250 bar · Standard: 140 bar
A-B	1/2"

Part nº	R1	Type	Max. flow (l/min)	Max. Press. (bar)	Levers	I	L
FM55/1 1/2 1P DE	1/2'' BSP	D.E.	70	300	1	55	94
FM55/1 1/2 1P SE	1/2'' BSP	S.E.	70	300	1	55	94
FM55/2 1/2 2P DD	1/2'' BSP	DE - DE	70	300	2	90	129
FM55/2 1/2 2P DS	1/2'' BSP	DE - SE	70	300	2	90	129
FM55/3 1/2 3P DDD	1/2'' BSP	DE - DE - DE	70	300	3	125	164
FM55/3 1/2 3P DDS	1/2'' BSP	DE - DE - SE	70	300	3	125	164
FM55/3 1/2 3P DSS	1/2'' BSP	DE - SE - SE	70	300	3	125	164
FM55/4 1/2 4P DDDD	1/2'' BSP	DE - DE - DE - DE	70	300	4	160	199
FM55/4 1/2 4P DDDS	1/2'' BSP	DE - DE - DE - SE	70	300	4	160	199
FM55/4 1/2 4P DDSS	1/2'' BSP	DE - DE - SE - SE	70	300	4	160	199
FM55/5 1/2 5P DDDDD	1/2'' BSP	DE - DE - DE - DE - DE	70	300	5	195	234
FM55/6 1/2 6P DDDDDD	1/2'' BSP	DE - DE - DE - DE - DE - DE	70	300	6	230	269

FM55= BM50

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.