
Gear pumps

Gear pumps Group III Right

Gr.III Gear pump/Eur.flange/Tapered shaft 1:8 /Side ports type threaded



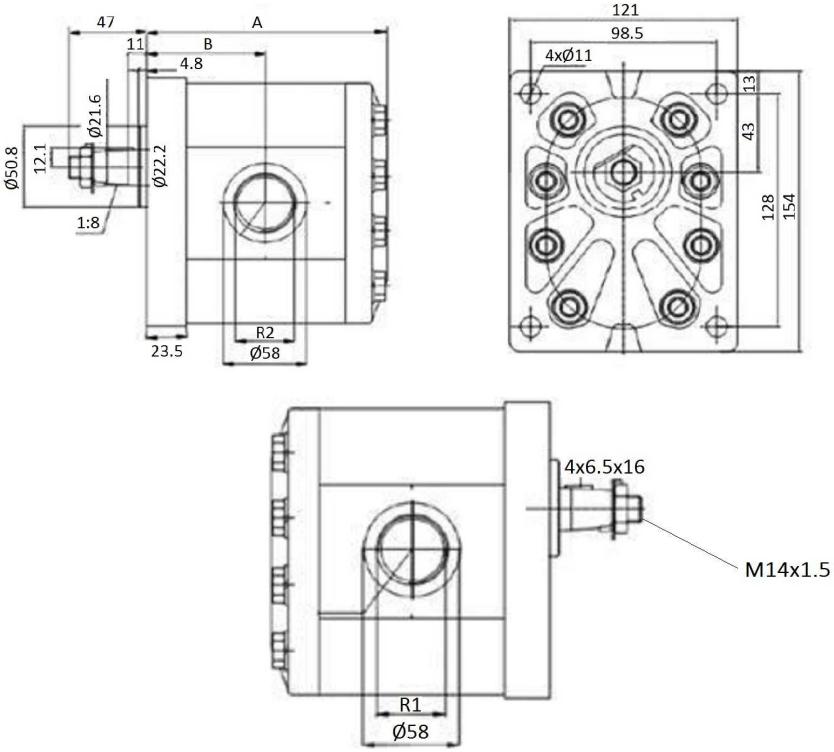

Rotation reference: BTD...I=Rotation left
BTD...D=Rotation right

Min 400 rpm

Flange and rear cover Cast iron

Part nº	R1	R2	Max. Press. (bar)	Max. Peak press.	R.P.M. Max	cm³/ rev	A	B
BTD3220D01	3/4" BSP	3/4" BSP	200	250	3000	22	130,5	63,5
BTD3260D01	3/4" BSP	3/4" BSP	200	250	3000	26	133,5	65
BTD3280D01	1" BSP	3/4" BSP	200	250	3000	28	134,5	65,5
BTD3320D01	1" BSP	3/4" BSP	200	250	3000	32	137,5	67
BTD3360D01	1" BSP	3/4" BSP	200	250	3000	36	140,5	68,5
BTD3420D01	1" BSP	3/4" BSP	200	250	2800	42	144,5	70,5
BTD3460D01	1" BSP	3/4" BSP	200	250	2400	46	147,5	72
BTD3500D01	1" BSP	3/4" BSP	200	250	2400	50	150	73,5
BTD3550D01	1" BSP	3/4" BSP	200	250	2400	55	153,5	75

R1 = inlet; R2 = outlet
DECIBELS: 85dB
Tightening torque 45-50 Nm

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.