
GreenLine

GreenLine Spare parts

GreenLine Heat exchangers

Heat exchangers oil/air with thermostat

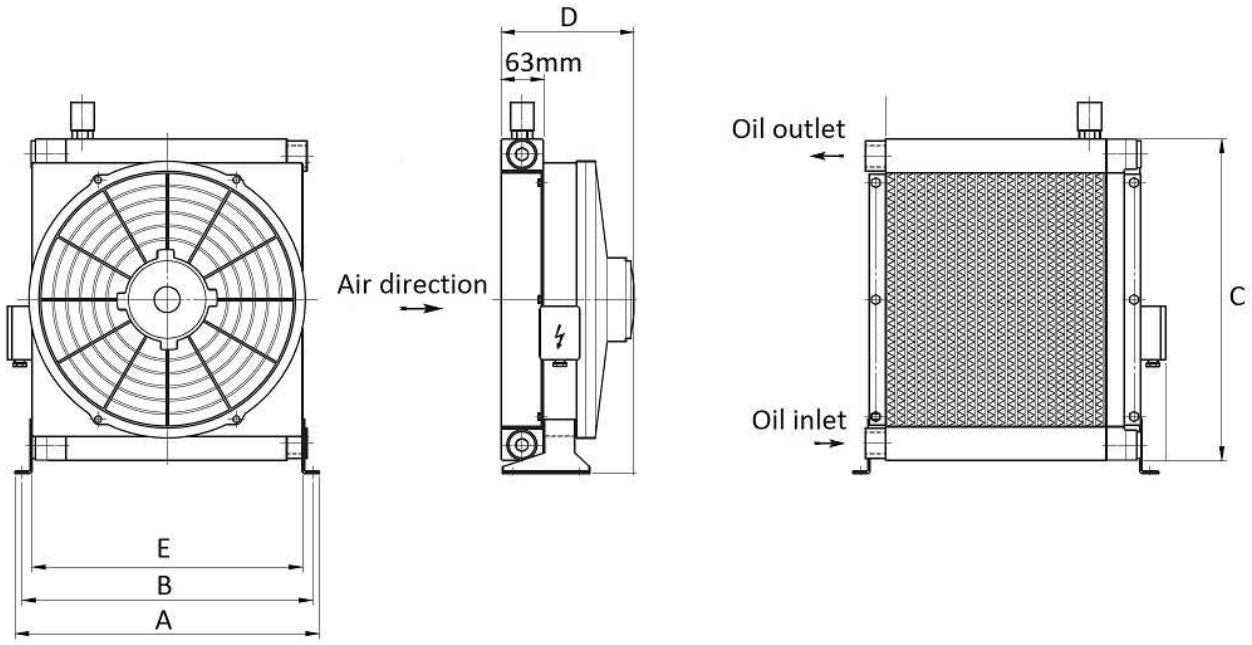

Part nº	R1	Voltage (V)	Power (W)	Min. flow (l/min)	Max. flow (l/min)	Cap. (l)	Air flow (m³/h)	P(IP)	Current	Noise level db(A)	A	B	C	D	E
INTER21012V	1" BSP	12 VDC	120	30	100	1,7	1.600	68	10	75	284	258	322	235	296
INTER21024V	1" BSP	24 VDC	120	30	100	1,7	1.600	68	5	75	284	258	322	235	296
INTER25012V	1" BSP	12 VDC	168	30	140	1,7	1.800	68	14	75	371	345	372	235	377
INTER25024V	1" BSP	24 VDC	168	30	140	2	1.800	68	7	75	371	345	372	235	377
INTER39024V	1" BSP	24 VDC	204	50	150	5	2.600	68	8.5	83	461	435	480	250	457

***** Review attached PDF*****

Maximum Working Pressure: 30 Bar

Continuous working pressure 10 - 25 Bar

The thermostat activates the radiator when it goes above 60ºC and turns off when it drops below 50ºC.

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.