


HCD 3M sectional control valves



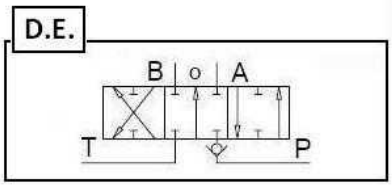

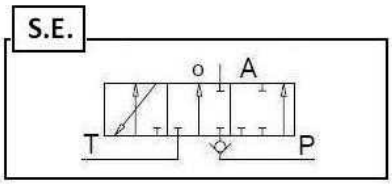

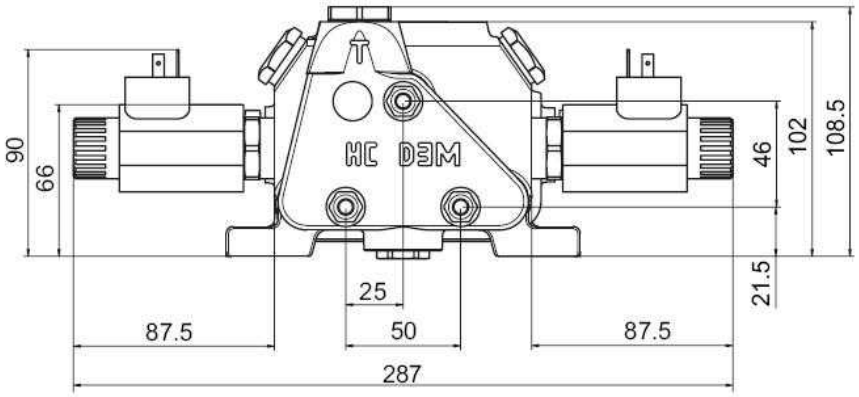

Nominal Flow	55 l/min
Nominal Pressure	350 bar
Max Tank-Line Pressure	20 bar
Operating Temperature	-25ºC / 80ºC
Torque	35 Nm
Max Numbre of Sections	8

Part nº	R1	Voltage (V)	Type
CUERPO HCD3M DE 12VDC	1/2"BSP	12 VDC	D.E.
CUERPO HCD3M SE 12VDC	1/2"BSP	12 VDC	S.E.

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.