


Hydraulic valves


Check valves

Double pilot operated check valve in block with fittings DIN 2353

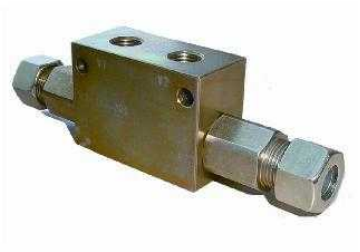

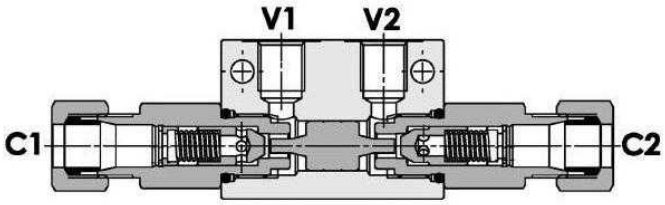



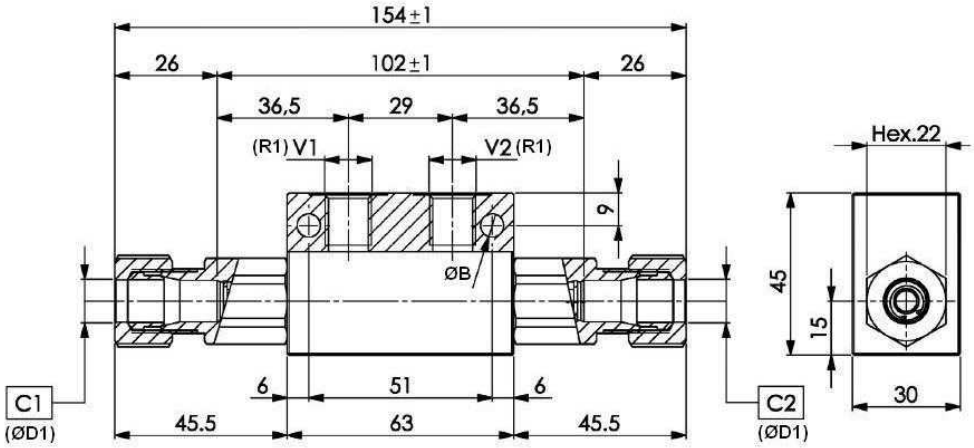

Material Zinc Plated Steel Body

Cracking Pressure 2 bar

Part nº	ØD1	R1	Max. flow (l/min)	Max. Press. (bar)	Pilot ratio
VT008006202RO	12	3/8" BSP	20	250	1 : 4

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.