


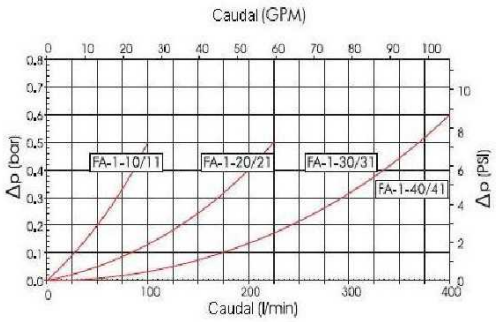

Max Pressure 12 bar

Filter Media · Cellulose: 10 µm, 25 µm
· Wire mesh: 60 µm,125 µm

Materials ·Body: Aluminium
·Seal: Buna-N

Working Temperature -25ºC / 120ºC

Part nº	Size	Filtration degree	ØA	ØB	C	MATERIAL
SPA-1-10-C10	10	10 µm	96	3/4"	148	CELLULOSE
SPA-1-11-C10	11	10 µm	96	3/4"	213	CELLULOSE
SPA-1-20-C10	20	10 µm	128	1 1/4"	182	CELLULOSE
SPA-1-21-C10	21	10 µm	128	1 1/4"	228	CELLULOSE
SPA-1-10-C25	10	25 µm	96	3/4"	148	CELLULOSE
SPA-1-11-C25	11	25 µm	96	3/4"	213	CELLULOSE
SPA-1-20-C25	20	25 µm	128	1 1/4"	182	CELLULOSE
SPA-1-21-C25	21	25 µm	128	1 1/4"	228	CELLULOSE
SPA-1-10-T60	10	60 µm	96	3/4"	148	WIRE MESH
SPA-1-11-T60	11	60 µm	96	3/4"	213	WIRE MESH
SPA-1-20-T60	20	60 µm	128	1 1/4"	182	WIRE MESH
SPA-1-21-T60	21	60 µm	128	1 1/4"	228	WIRE MESH
SPA-1-10-T125	10	125 µm	96	3/4"	148	WIRE MESH
SPA-1-11-T125	11	125 µm	96	3/4"	213	WIRE MESH
SPA-1-20-T125	20	125 µm	128	1 1/4"	182	WIRE MESH
SPA-1-21-T125	21	125 µm	128	1 1/4"	228	WIRE MESH

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.