

Oleodinamica Marchesini CR01736Z hollow mounting bolt

Manufacturer: Oleodinamica Marchesini
Manufacturer part number / published order designation: CR01736Z
Published model: CR01736Z

About this compilation

Prepared by Hydmaster from selected manufacturer documentation. Original technical pages follow without cropped drawings, rewritten data or altered units. This cover and index are Hydmaster editorial material, not a manufacturer-issued exact-execution datasheet.

Coverage: selected pages relevant to the identified size and configuration. Other options or neighbouring models retained on an original page apply only where explicitly identified.

Execution notes and conditions

350bar appears on exact bolt row; flow/mass/material not stated, not borrowed from valve. Axial lengths retained as labelled separate drawing segments.

This reference applies to the identified article; companion valve specifications do not automatically apply to accessories.

Actual selected supplier code; no order-code combinations generated.


Source-page index

Source page numbers below are physical pages of each complete original PDF. The original printed page labels and technical content remain unchanged. Compiled page numbers count this cover/index.


Source A: Oleodinamica Marchesini VAU OM WSC technical datasheet

Original pages	Compiled pages	Relevant content
1	2	Exact named article/accessory row or drawing, hydraulic function, applicable ratings and installation notes

VALVOLE ANTIURTO FLANGIABILI CON VITI SU MOTORI
DANFOSS OMP/OMR
DUAL CROSS LINE RELIEF VALVES FLANGEABLE ON DANFOSS
MOTORS OMP/OMR BY SCREWS

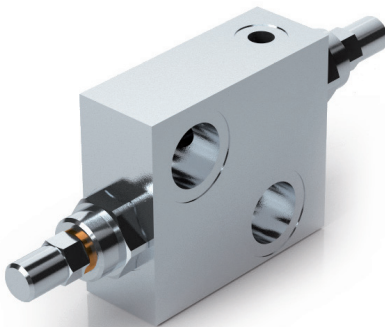

SCHEMA IDRAULICO
HYDRAULIC DIAGRAM

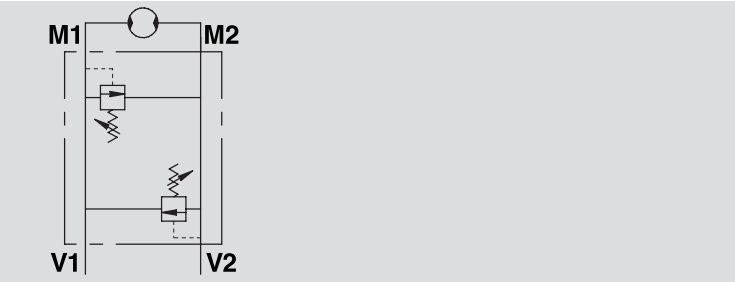


IMPIEGO:
Costituite da due valvole di massima pressione con scarico incrociato, sono utilizzate per limitare la pressione in entrambi i rami del motore idraulico ad un determinato valore di taratura.
La flangiatura diretta, adatta per motori Danfoss della serie OMP-OMR, garantisce la massima sicurezza, minime perdite di carico e compattezza d'installazione.

MATERIALI E CARATTERISTICHE:
Corpo: acciaio zincato.
Componenti interni: acciaio temprato termicamente e rettificato.
Guarnizioni: BUNA N standard.
Tenuta: a cono guidato. Trafilamento trascurabile.

MONTAGGIO:
Flangiare M1 e M2 direttamente al motore tramite i bulloni forati (a richiesta) e collegare V1 e V2 all'alimentazione.

A RICHIESTA
• molle per diversi campi di taratura (vedi tabella)
• pressione di taratura diversa da quella standard (CODICE/T000 specificando il valore di taratura)

PRESSIONE / PORTATA
PRESSURE / FLOW

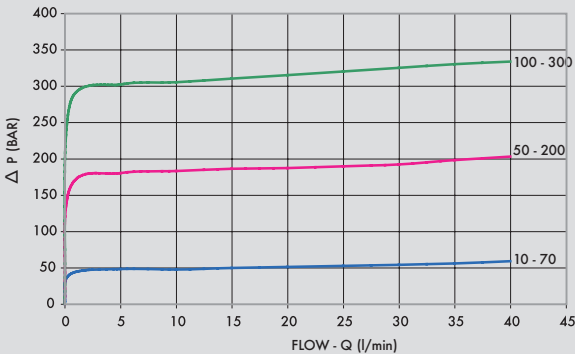

USE AND OPERATION:
Made up by two cross port relief valves, these valves are used to limit the pressure in the ports of a hydraulic motor to a certain setting. Direct flange mounting for Danfoss motors type OMP-OMR provides maximum safety, very low pressure drop and a robust installation.

MATERIALS AND FEATURES:
Body: zinc-plated steel.
Internal parts: hardened and ground steel.
Seals: BUNA N standard.
Poppet type: minor leakage.


CONNECTIONS:
Flange M1 and M2 directly to the motor by bolts (available on request) and connect ports V1 and V2 to the supply.

ON REQUEST
• different setting range (see the table)
• other setting available (CODE/T000 please specify the desired setting)

Temperatura olio: 50 °C - Viscosità olio: 30 cSt
Oil temperature: 50 °C - Oil viscosity: 30 cSt

CODICE CODE	SIGLA TYPE	PORTATA MAX MAX FLOW Lt. / min	PRESSIONE MAX MAX FLOW Bar
V0503/000*	VAU 1/2" OM WSC	50	350
CR01736Z	VITE 1/2"	-	350

*000 = specificare valore della molla desiderata. Vedi tabella sotto.
*000 = please specify the desired setting range. See the table below.

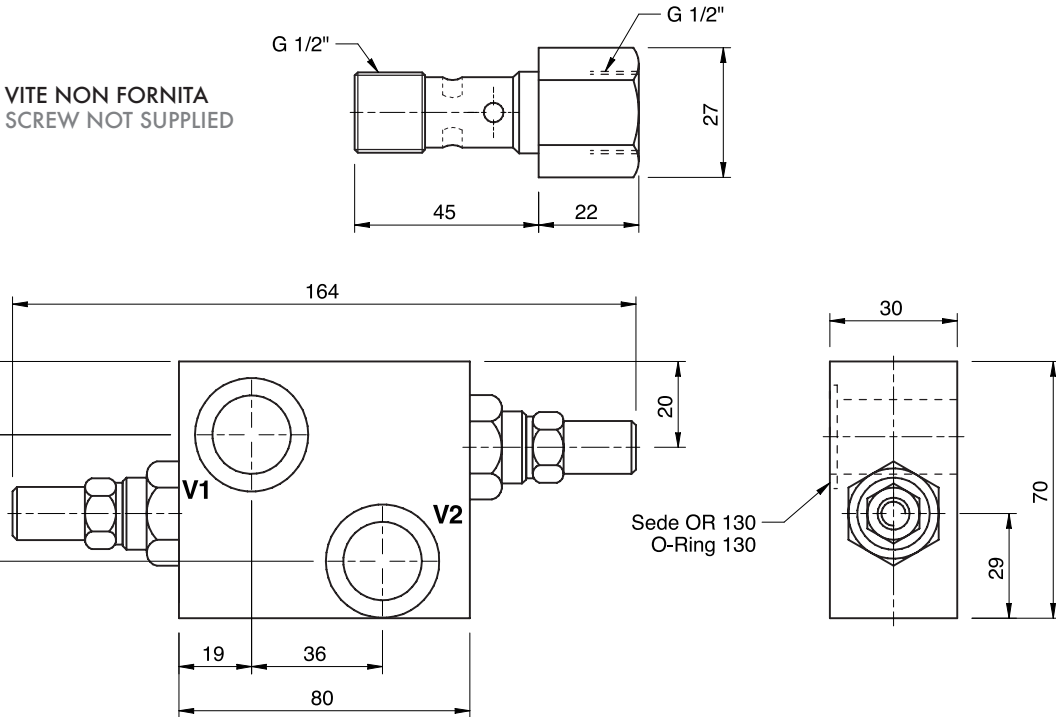

CODICE CODE	SIGLA TYPE	PESO/ WEIGHT Kg
V0503/000*	VAU 1/2" OM WSC	1,150

CODICE CODE	CAMPO DI TARATURA SETTING RANGE (Bar)	REGOLAZIONE - ADJUSTEMENT
COD/070	10 - 70	CODICE/V • CODE/V Volantino • Handknob
COD/200	50 - 200	CODICE/PP • CODE/PP Predisposizione alla piombatura • Arranged for sealing cap
COD/300	100 - 300	CODICE/P • CODE/P Piombatura • Sealing cap