

Oleodinamica Marchesini B8000 valve mounting flange

Manufacturer: Oleodinamica Marchesini
Manufacturer part number / published order designation: B8000
Published model: B8000

About this compilation

Prepared by Hydmaster from selected manufacturer documentation. Original technical pages follow without cropped drawings, rewritten data or altered units. This cover and index are Hydmaster editorial material, not a manufacturer-issued exact-execution datasheet.

Coverage: selected pages relevant to the identified size and configuration. Other options or neighbouring models retained on an original page apply only where explicitly identified.

Execution notes and conditions

Accessory only: no valve flow/pressure/pilot/cracking/material/mass borrowed; dimensions from named flange drawing.

This reference applies to the identified article; companion valve specifications do not automatically apply to accessories.

Actual selected supplier code; no order-code combinations generated.


Source-page index

Source page numbers below are physical pages of each complete original PDF. The original printed page labels and technical content remain unchanged. Compiled page numbers count this cover/index.


Source A: Oleodinamica Marchesini VBCD SE FL technical datasheet

Original pages	Compiled pages	Relevant content
1	2	Exact named article/accessory row or drawing, hydraulic function, applicable ratings and installation notes

VALVOLE DI BLOCCO E CONTROLLO DISCESA
A SEMPLICE EFFETTO A FLANGIA
SINGLE OVERCENTRE VALVES FLANGEABLE



SCHEMA IDRAULICO
HYDRAULIC DIAGRAM

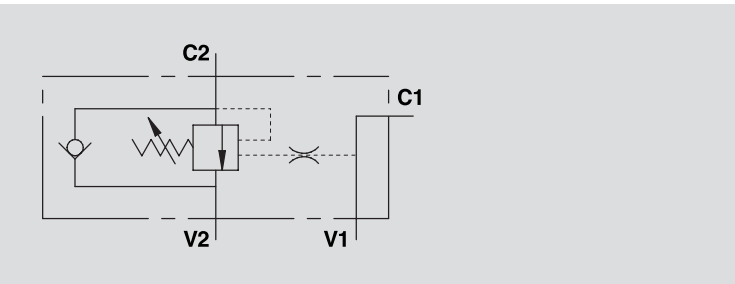

IMPIEGO:
Valvola utilizzata per controllare il movimento e il blocco dell'attuatore in una sola direzione realizzando la discesa controllata del carico che non sfugge trascinato dal proprio peso, in quanto la valvola non consente alcuna cavitazione dell'attuatore. Gli attacchi a flangia consentono il montaggio diretto della valvola sull'attuatore.

MATERIALI E CARATTERISTICHE:
Corpo: acciaio zincato.
Componenti interni: acciaio temprato termicamente e rettificato.
Guarnizioni: BUNA N standard.
Tenuta: trafilemento trascurabile.
Taratura standard: 320 Bar.
La taratura della valvola deve essere almeno 1,3 volte superiore alla pressione indotta dal carico per consentire alla valvola di chiudersi anche quando sottoposta alla pressione corrispondente al carico massimo.

MONTAGGIO:
Collegare V1 e V2 all'alimentazione, C1 al lato dell'attuatore con flusso libero e flangiare C2 al lato dell'attuatore dove si desidera la tenuta. Gli attacchi V1 e V2 sono reversibili.

A RICHIESTA
• pressione di taratura diversa da quella standard.
• piombatura (CODICE/P) e predisposizione alla piombatura (CODICE/PP).
PERDITE DI CARICO
PRESSURE DROP CURVE


USE AND OPERATION:
These valves are used to control the actuator movements and block in one direction. In order to have the descent of a load under control and avoid the load's weight being carried away the valve will prevent any cavitation of the actuator. Flange ports enable direct mounting of the valve onto the actuator.

MATERIALS AND FEATURES:
Body: zinc-plated steel.
Internal parts: hardened and ground steel.
Seals: BUNA N standard.
Leakage: negligible leakage.
Standard setting: 320 Bar.
Valve setting must be at least 1.3 times more than load pressure in order to enable the valve to close even when subjected to the maximum load pressure.

CONNECTIONS:
Connect V1 and V2 to the supply, C1 to the free flow side of the actuator and flange C2 to the actuator side you want the flow to be blocked. V1 and V2 ports are reversible.

ON REQUEST
• non standard pressure settings
• sealing cap (CODE/P) and arrangement for sealing cap (CODE/PP)
Temperatura olio: 50 °C - Viscosità olio: 30 cSt
Oil temperature: 50 ° C - Oil viscosity: 30 cSt

CODICE CODE	SIGLA TYPE	RAPP. PILOT PILOT RATIO	PORTATA MAX MAX FLOW Lt. / min	PRESSIONE MAX MAX PRESSURE Bar
V0400	VBCD 3/8" SE FL	1:4,5	40	350
V0401	VBCD 3/8" SE FCB4	1:4,5	40	350
V0402	VBCD 1/2" SE FL	1:4,5	60	350

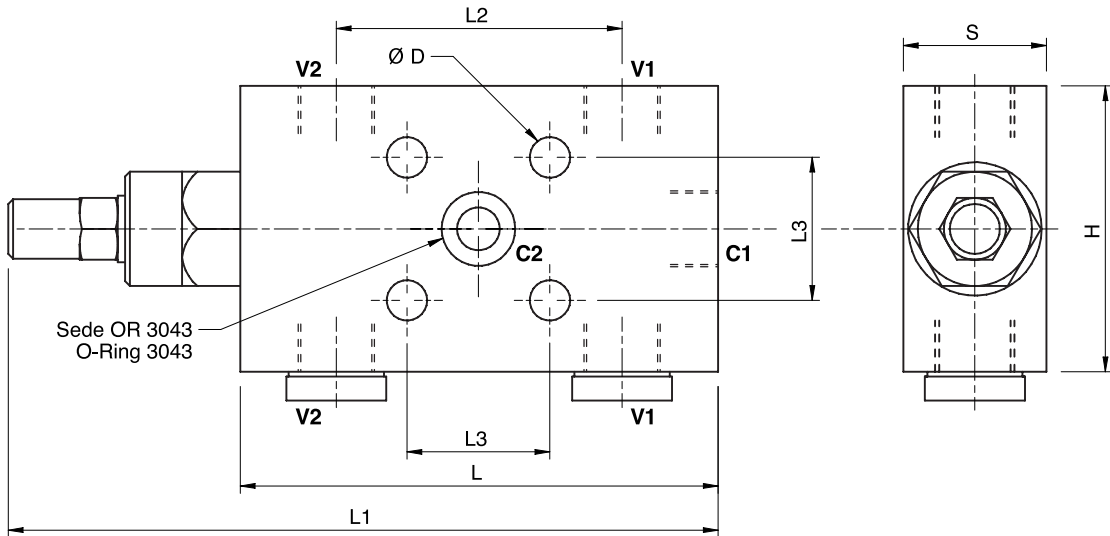

CODICE CODE	SIGLA TYPE	V1 - V2 C1	C2	L	L1	L2	L3	H	S	D	PESO WEIGHT kg
V0400	VBCD 3/8" SE FL	G 3/8"	Ø9	100	149	60	30	60	30	Ø8,5	1,248
V0401	VBCD 3/8" SE FCB4	G 3/8"	Ø9	90	139	/	28	55	30	Ø6,25	1,080
V0402	VBCD 1/2" SE FL	G 1/2"	Ø9	100	149	65	30	60	30	Ø8,5	1,212

BASE PER VALVOLA /
VALVE'S FLANGE:

