

Compressed air treatment elements


Filters

Metallic filter pressure reducer





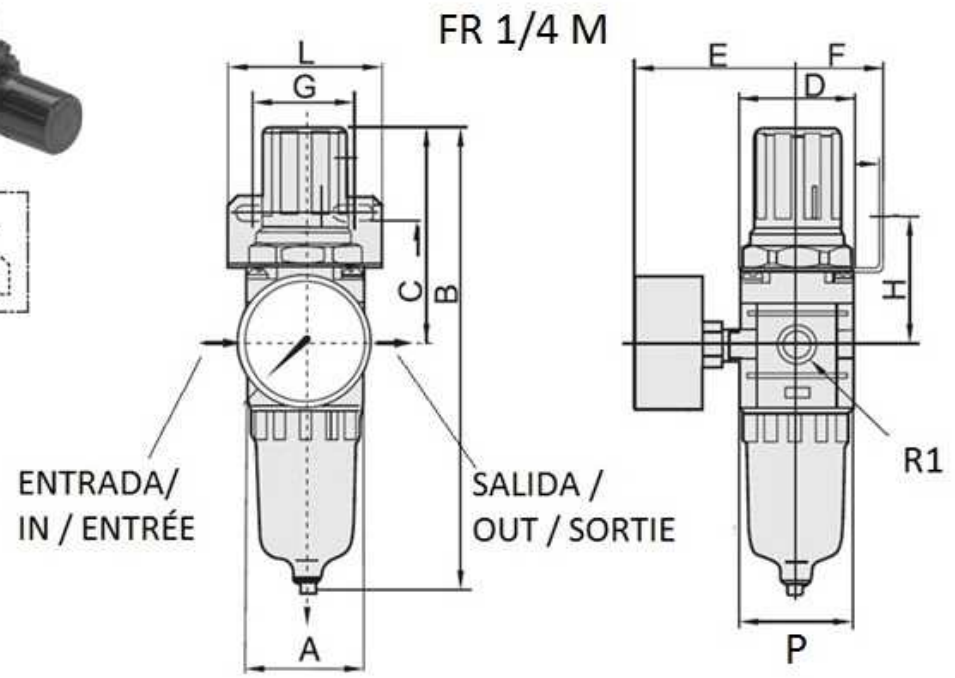

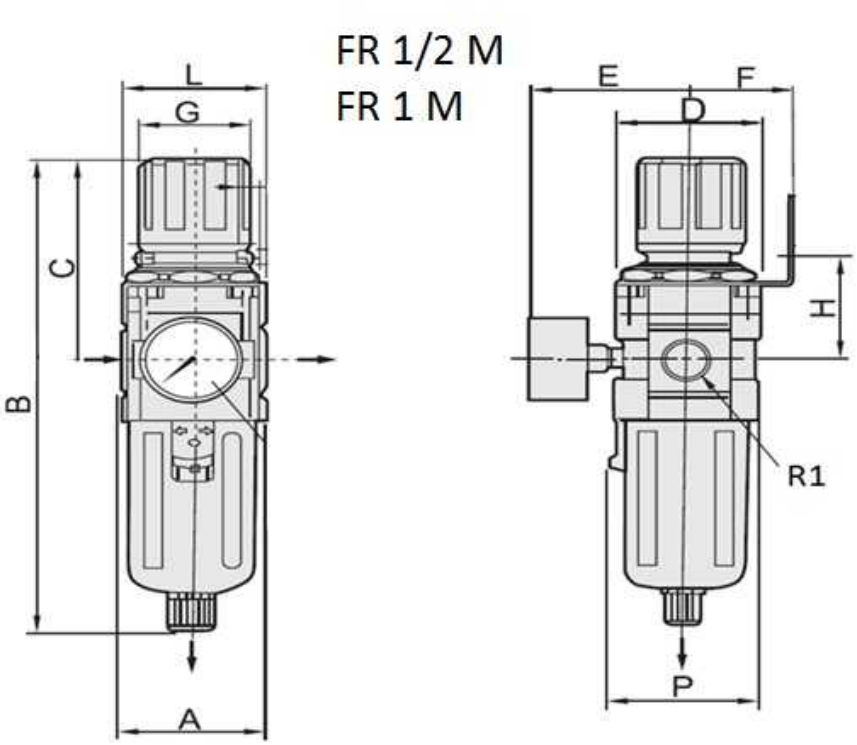

Working temp: 5 - 60 ºC

Filter precission: 25 µm

Pressure gauge included

Drain type: Manual

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

Compressed air treatment elements

Filters

Metallic filter pressure reducer

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	A	B	C	D	E	F	G	H	L	P
FR 1/4 M	1/4" BSP	550	10	40	164,5	78	40	56,8	30	34	43,5	55	40
FR 1/2 M	1/2" BSP	4000	10	70	262	112	70	70,5	49,2	54	53,5	70	73
FR 1 M	1" BSP	5500	10	90	338	116	90	75,5	49,2	54	62	70	90

1/4 "gauge with 1/8" BSP thread
1/2 "-1" gauge with 1/4 "BSP thread

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.