





TLA...M

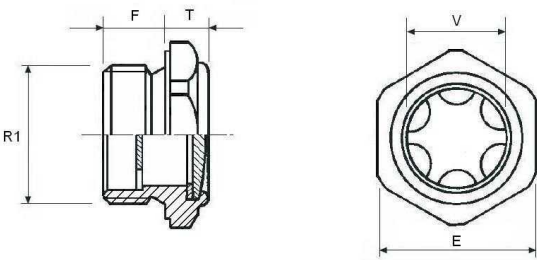

TLA/F...M

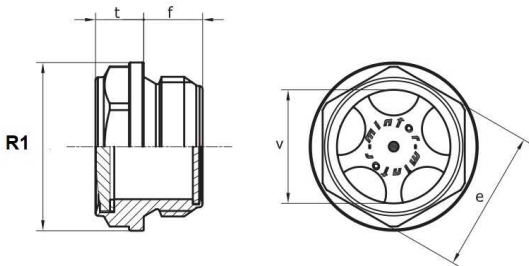

Visor: transparent polycarbonate

Part nº	R1	ØV	E	F	T
TLAN1M	M14X1.5	10	17	8	7
TLA6M	M24X1.5	16	30	11	9
TLA9M	M27X1.5	21	32	11	9
TLA12M	M33X1.5	27	40	14	10
TLAF1M	M16X1.5	10	18	9.5	9
TLAF2M	M18X1.5	13	20	9.5	9
TLAF3M	M20X1.5	16	22	10.5	9
TLAF4M	M22X1.5	16	22	10.5	9
TLAF9M	M30X1.5	21	32	13.5	11,5

Working temp: 0 - 120°C.
Recommended pressure: 5 bar.