




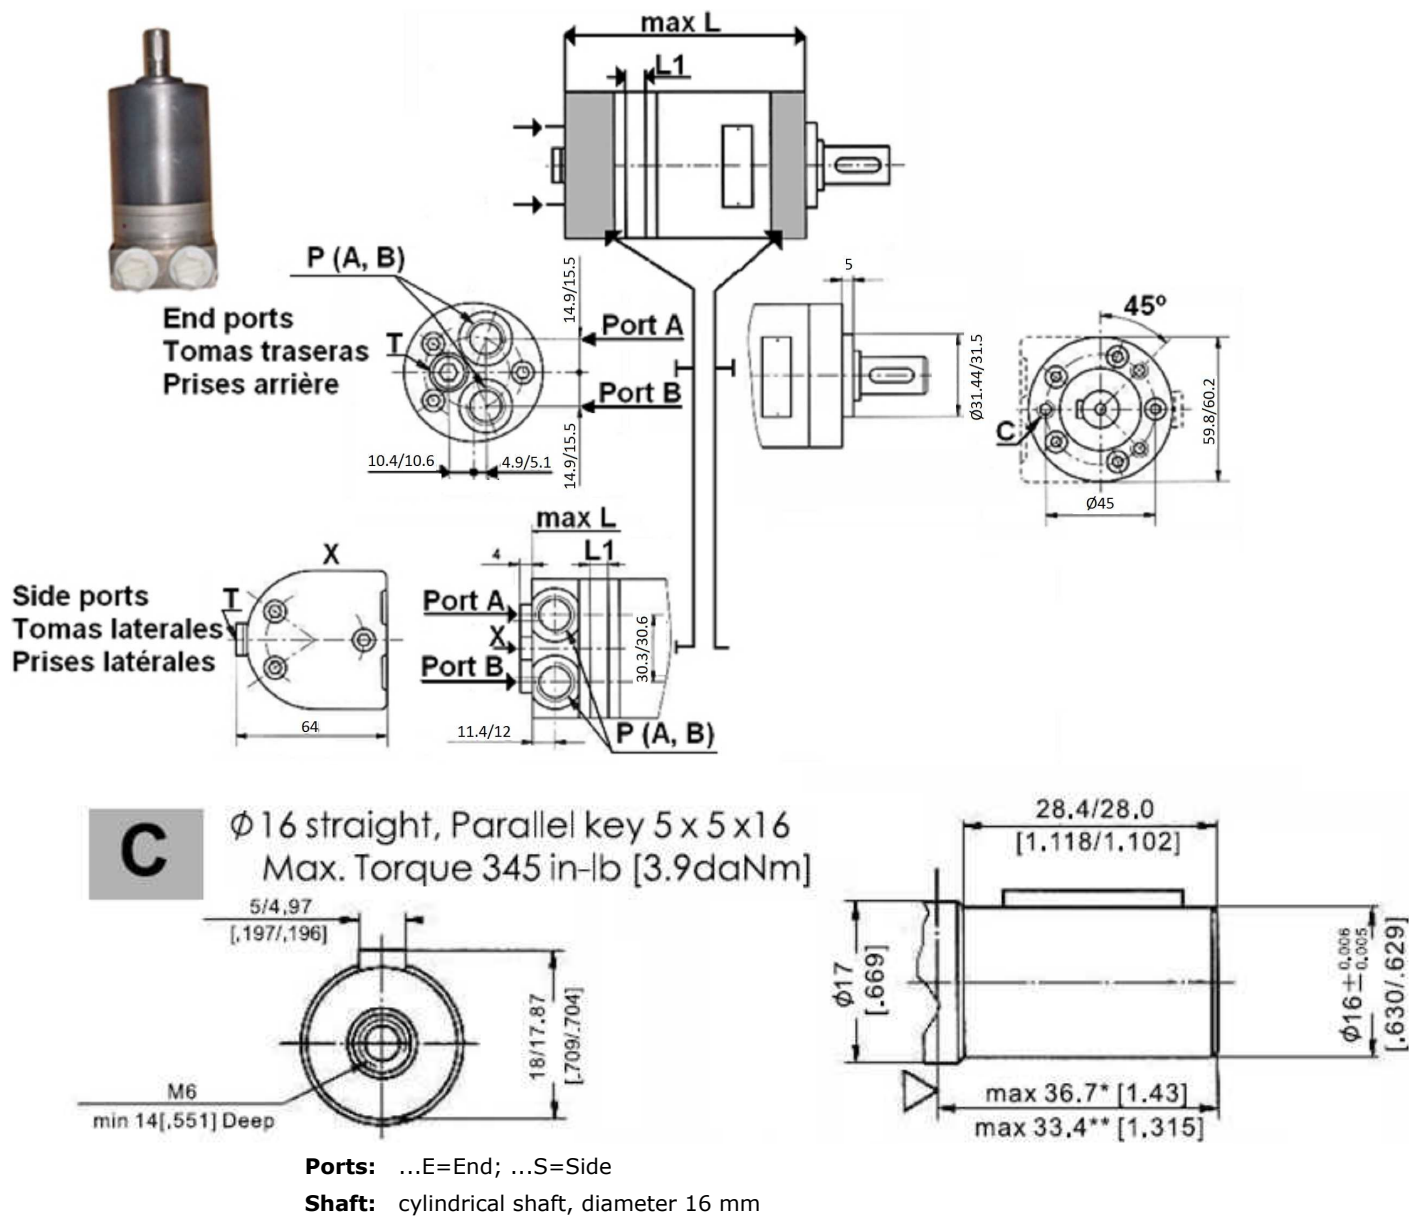

Hydraulic motors

Hydraulic motors

MOMM type motor 16mm Ø

Page: 2/2

Part n°	R1	Max. flow (l/min)	Max. press. cont.	Max. press. interm.	Max. Peak press.	cm ³ / rev	R.P.M. cont.	R.P.M. int.	Max. torque cont.	Max. torque peak	Max. power cont.	Max. flow cont.	L1	L
MOMM40 S	3/8" BSP	20	90	140	160	39.8	500		4,5	8,2	2,2	20	17	119,5
MOMM50 E	3/8" BSP	20	70	140	160	50.3	400	500	4,6	1	1,8	20	21,5	122,5
MOMM50 S	3/8" BSP	20	70	140	160	50.3	400	500	4,6	1	1,8	20	21,5	124

*** Review attached PDF***

*Intermittent operation rating applies to 10% of every minute.

*Peak load rating applies to 1% of every minute.

Drain plug 1/8"