

Solenoid valves


Modular blocks for NG10

NG10 Check valve in A





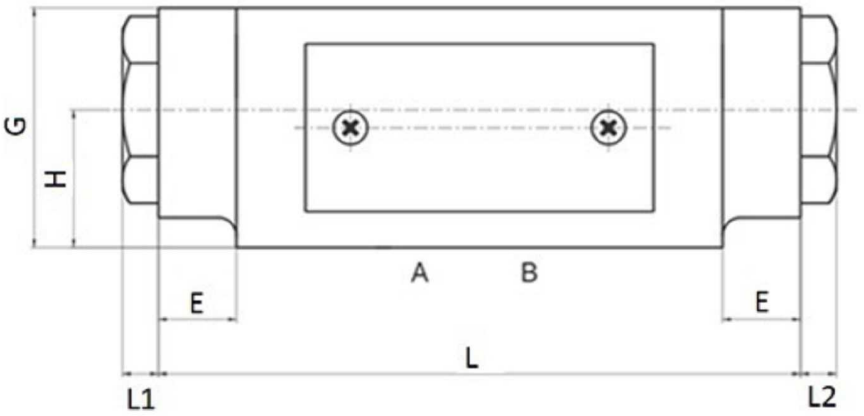

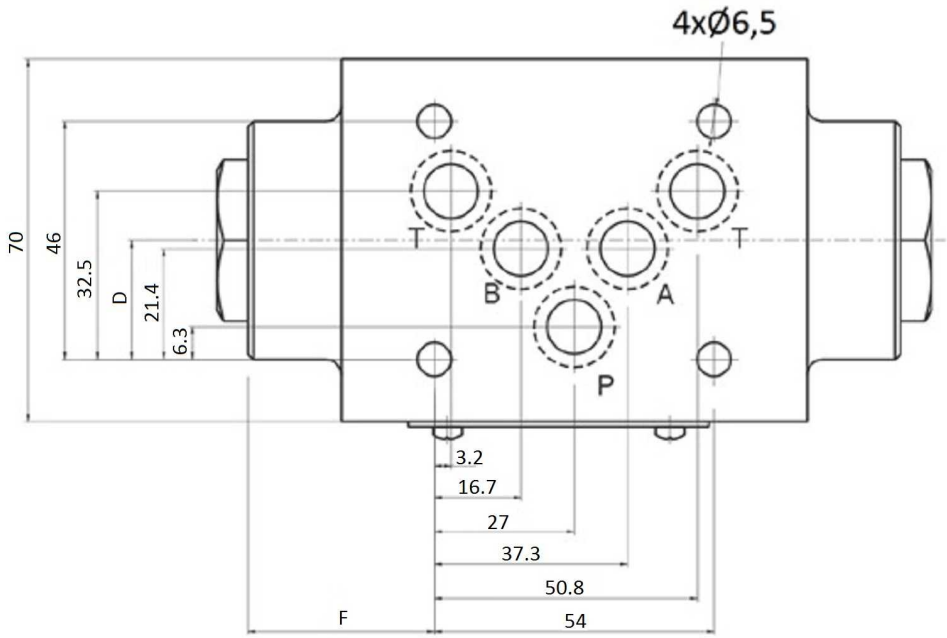

Cast iron body

Spring opening: 0,5 Bar

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

NG10 Check valve in A

Part nº	Size	Max. flow (l/min)	Max. Press. (bar)	L	L2	D	E	F	G	H
AKV-10-A H	NG-10	100	315	80	6	18,5	-	10	55	27,5

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.