

Solenoid valves

Modular blocks for NG10

NG10 Flow control valve in A and B with check valve



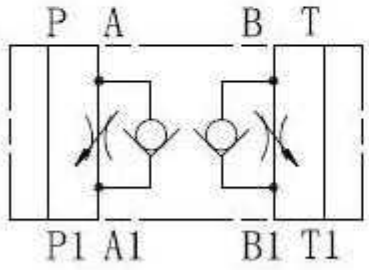

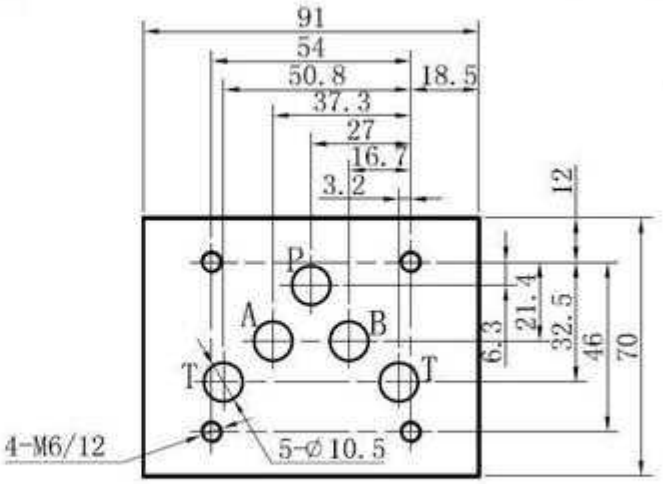

Operating Pressure 315 bar

Flow Rate 50 l/min

4 Screw Set Included M6x95

Total height: 31,7 mm

Cast iron body

Part nº	Size
RCKV-10-D H	NG-10

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.