

Solenoid valves

Modular blocks for NG10

NG10 Pilot check valve in A





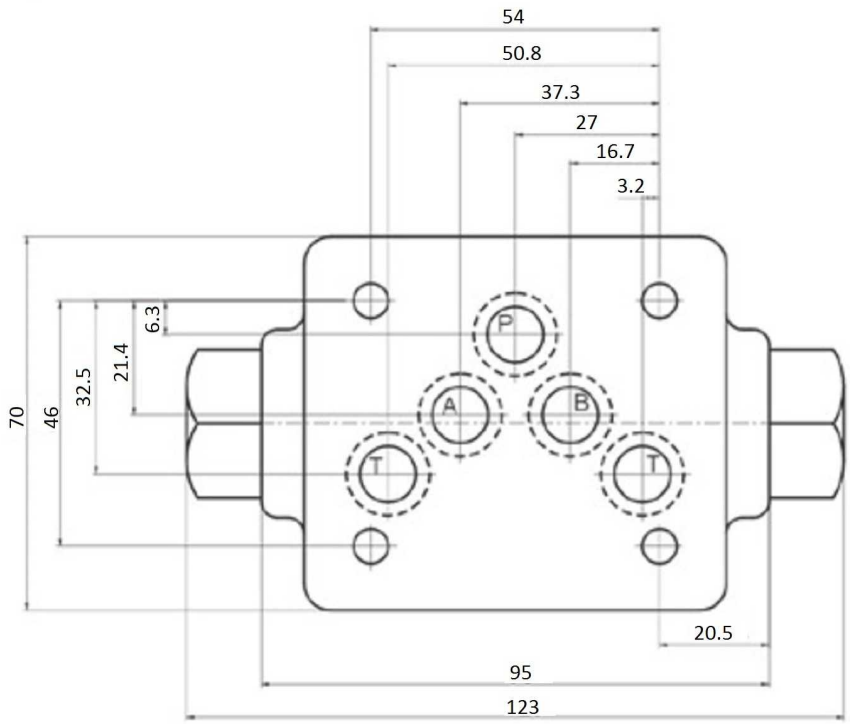

Operating Pressure	315 bar
Cracking Pressure of check valve	4 bar
Flow Rate	80 l/min
4 Screw Set Included	M6X95
Cast iron body	

Part nº	Size	Max. flow (l/min)	Max. Press. (bar)
APKV-10-A H	NG-10	70	315

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.