

Solenoid valves


Modular blocks for NG10


NG10 Pilot check valve in B





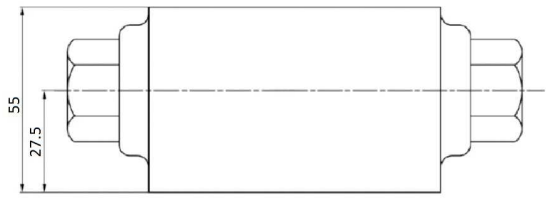



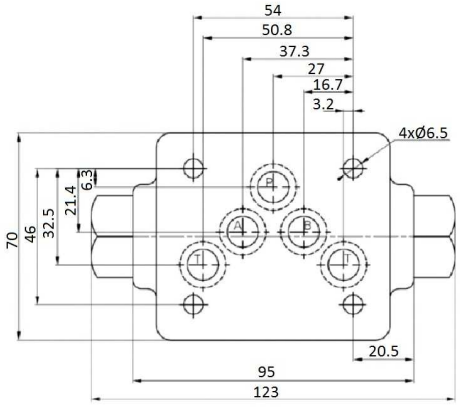

Cast iron body	
Operating Pressure	315 bar
Cracking Pressure of check valve	4 bar
Flow Rate	80 l/min

Part nº	Size	Max. flow (l/min)	Max. Press. (bar)
APKV-10-B H	NG-10	70	315

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.