


NG10 Pilot operated pressure reducing valve





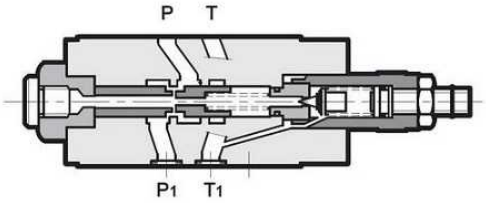

ISO 4401-05-04-0-05
(CETOP 4.2-4-05-320)

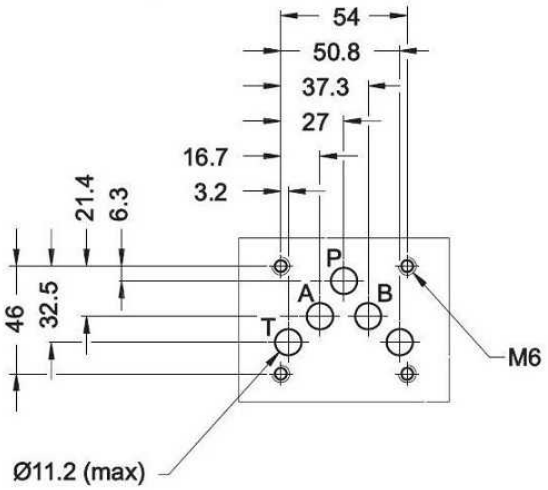

Max. flow rate in controlled line P: 80 l/min

Max. flow rate in free lines: 100 l/min

Part nº	Size	Max. flow (l/min)	Max. Press. (bar)	Reg. rate (bar)
Z4M3-I/50	NG-10	80	320	5 - 70
Z4M4-I/50	NG-10	80	320	8 - 140
Z4M6-I/50	NG-10	80	320	15 - 320

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.