


NG10 sequence valve in P





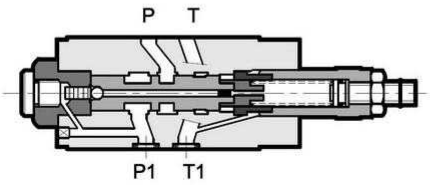

ISO 4401-05-05-0-05
(CETOP 4.2-4-R05-320)

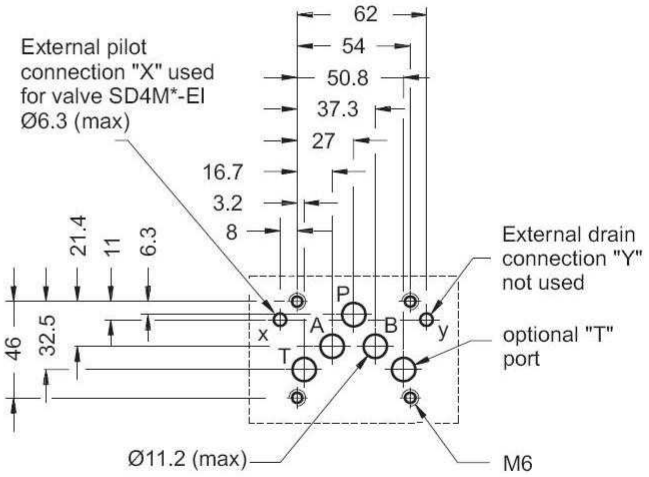

Max. pressure -port T: 10 bar

Max. flow rate in controlled lines: 80 l/min

Max. flow rate in free lines: 100 l/min

Part nº	Size	Max. flow (l/min)	Max. Press. (bar)	Reg. rate (bar)
SD4M3/50	NG-10	80	320	0 - 70
SD4M4/50	NG-10	80	320	0 - 140
SD4M5/50	NG-10	80	320	0 - 210

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.