

Solenoid valves


Modular blocks for NG6

NG6 Check valve in B





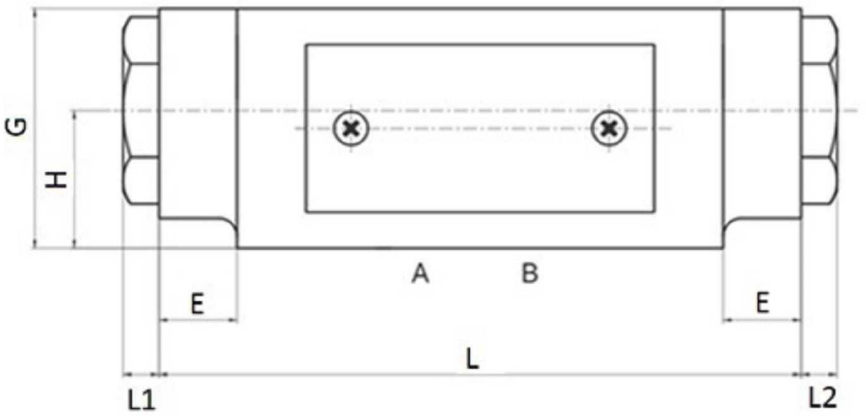

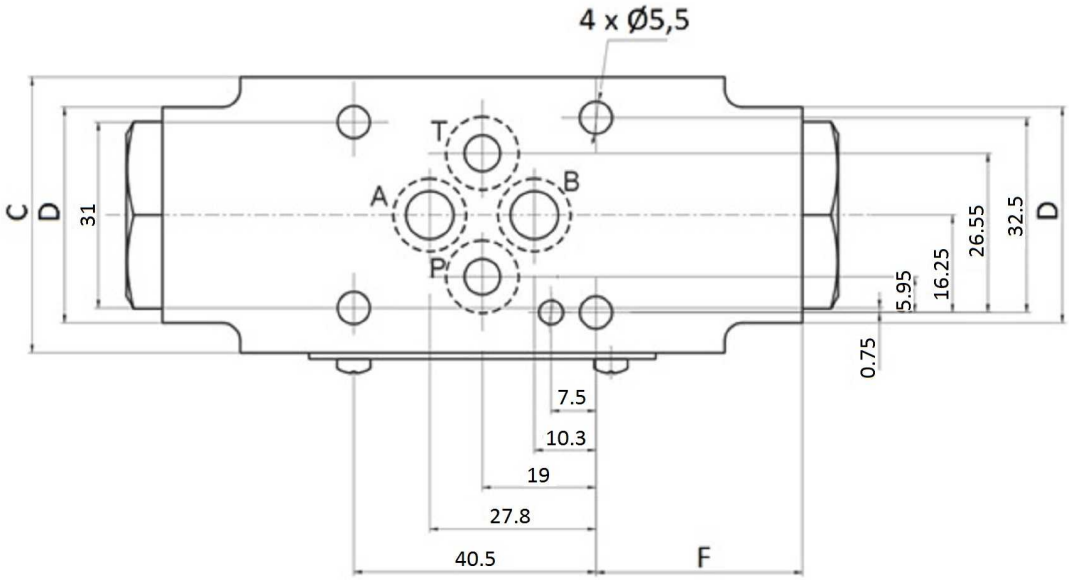

Cast iron body

Spring opening: 0,5 Bar

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

Solenoid valves

Modular blocks for NG6

NG6 Check valve in B

Part nº	Size	Max. flow (l/min)	Max. Press. (bar)	L	L1	L2	C	D	E	F	G	H
AKV-6-B H	NG-6	40	315	80	-	6	46	/	/	20	40	20

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.