NG6 double relief valve in A & B crossed discharge



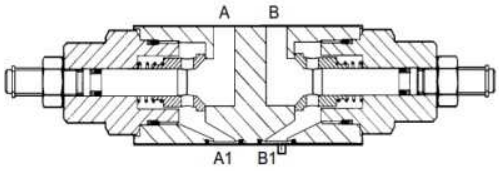

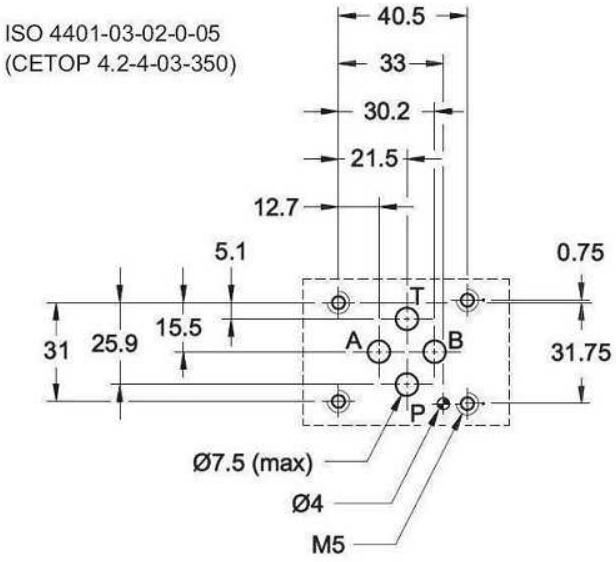

Max. flow rate in controlled lines: 50 l/min

Max. flow rate in free lines: 75 l/min

Part nº	Size	Max. Press. (bar)	Reg. rate (bar)
MCD5-D/51N	NG-6	350	0 - 210
PRM3-D070/10N/S/W7	NG-6	350	0 - 70
PRM3-D140/10N/S/W7	NG-6	350	0 - 140
PRM3-D210/10N/S/W7	NG-6	350	0 - 210
PRM3-D350/10N/S/W7	NG-6	350	0 - 350

W7 zinc plated

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.