

Solenoid valves

Modular blocks for NG6

NG6 Pilot check valve in B



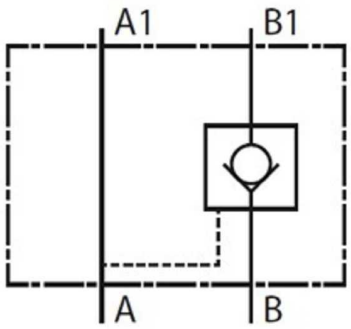

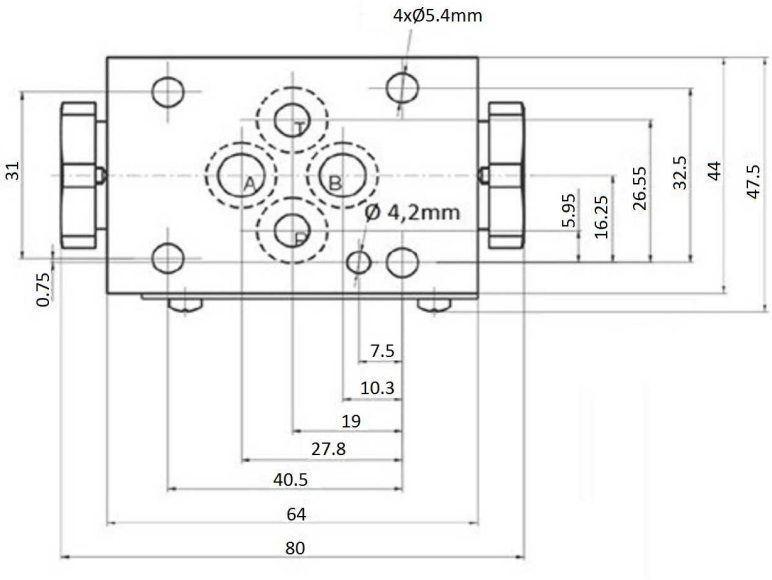

Max. Working Pressure	315 bar
Opening Pressure	0,5 bar
Max. Flow	60 l/min
4 Screw Set Included	M5x85
Pilot ratio:	1:2.9
Height:	40 mm
Cast iron body	

Part nº	Size	Max. flow (l/min)	Max. Press. (bar)
APKV-6-B H	NG-6	60	315

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.