

Solenoid valves

Modular blocks for NG6

NG6 Pressure relief valve in P



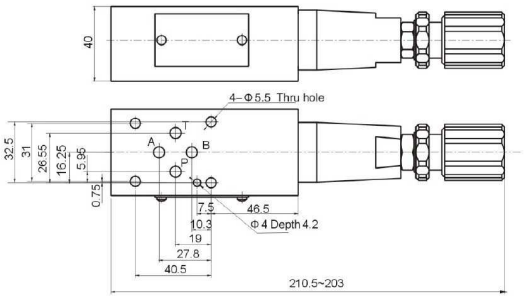



Flow Rate 60 l/min

Max. Pressure 315 bar

Adjustement knob

Cast iron body

Part nº	Size	Max. flow (l/min)	Max. Press. (bar)	Reg. rate (bar)
LPKV-6-P-100 H	NG-6	35	315	15 - 100
LPKV-6-P-315 H	NG-6	35	315	70 - 315

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.