


NG6 relief valve in A dischage in T





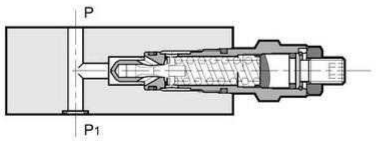

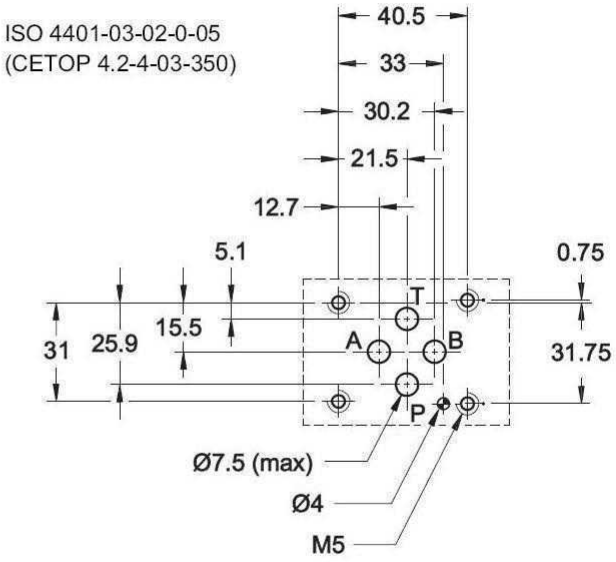

Max. flow rate in controlled lines 50 l/min

Max. flow rate in free lines 75 l/min

Part nº	Size	Max. Press. (bar)	Reg. rate (bar)
MCD3-SAT/51N/K	NG-6	350	0 - 70
MCD6-SAT/51N	NG-6	350	0 - 350
PRM3-AT070/10N/K/W7	NG-6	350	0 - 70
PRM3-AT070/10N/S/W7	NG-6	350	0 - 70
PRM3-AT140/10N/S/W7	NG-6	350	0 - 140
PRM3-AT210/10N/S/W7	NG-6	350	0 - 210
PRM3-AT350/10N/S/W7	NG-6	350	0 - 350

*MCD3-SAT/51N/K-Adjustement knob
W7 zinc plated

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.