Solenoid valves

NG6 Solenoid valve

NG6 Solenoid

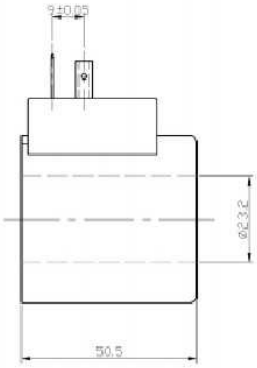

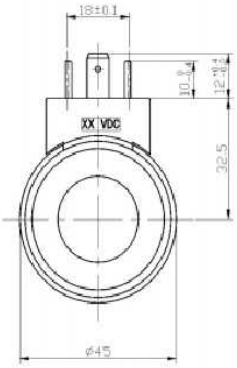

Power Consumption <=30 W
Insulation Class F
ED 100%
IP class IP 65
connector included

Part nº	Size	Voltage (V)	f (Hz)
MR-6-12CC H	NG-6	12 VDC	
MR-6-24CC H	NG-6	24 VDC	
MR-6-48CC H	NG-6	48 VDC	
MR-6-110CA H	NG-6	110 RAC	50
MR-6-220CA H	NG-6	220 VAC	50
MR-6-220RAC-H	NG-6	220 RAC	50/60
MR-6-12060CA H	NG-6	120 VAC (60 Hz)	60

***** Review attached PDF*****
MR-6-220RAC-H rectifier integrated into the coil

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.