

NG6 Solenoid valve - spool SA4

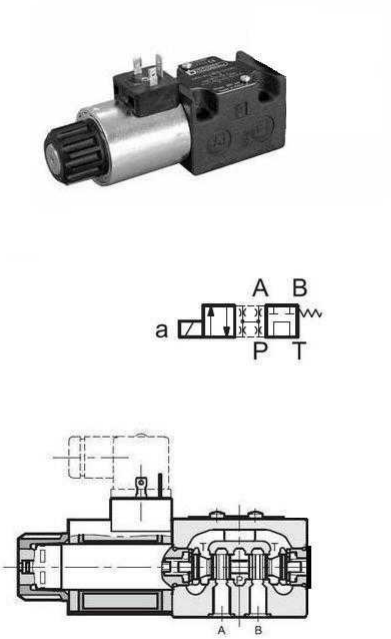

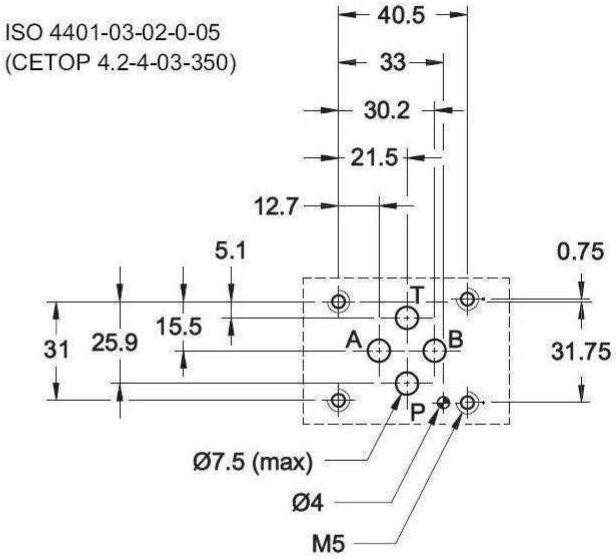

Max. work pressure: P - A - B ports= 350 bar
T port -Direct Current=210 bar
T port -Alternative Current=160 bar

Part nº	Size	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)	f (Hz)
DS3-SA4/10N-A230K1	NG-6	230 V-50Hz / 240 V-60Hz	40	350	50/60
DS3-SA4/10N-D24K1	NG-6	24 VDC	40	350	

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.