
Solenoid valves

Subplates for NG10

Parallel subplate for NG10 directional valve without relief valve, A & B side ports



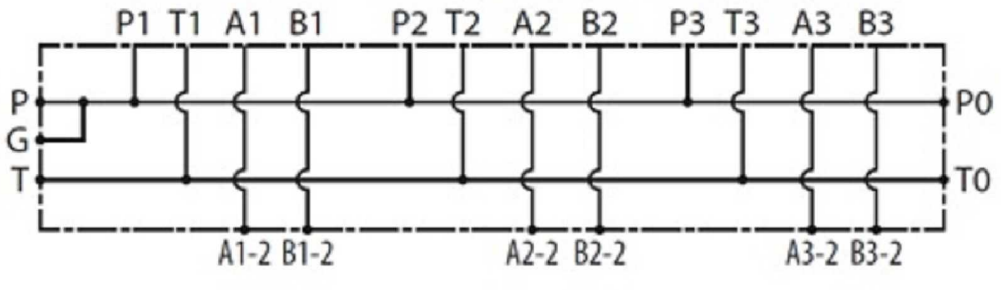

Forged steel

Part nº	Size	Nº directional valves	Flow (l/min)
PFNG102PL H	NG-10	2	120
PFNG103PL H	NG-10	3	120
PFNG104PL H	NG-10	4	120
PFNG105PL H	NG-10	5	120

***** Review attached PDF*****
Maximum flow: 120 L/min
Legs included
Max pressure: 315 bar

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.