
Solenoid valves

Subplates for NG10

Parallel subplate for NG10 directional valves with relief valve, A & B side ports



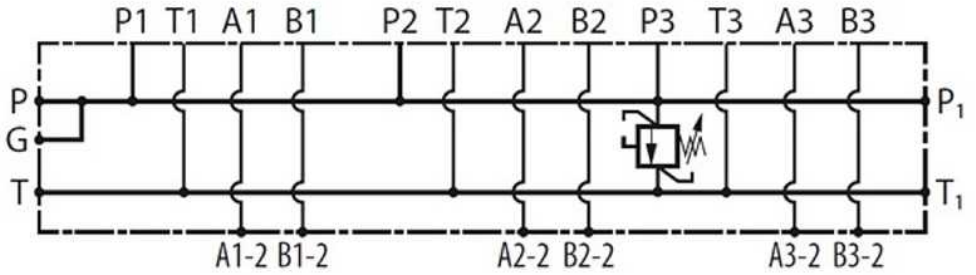

Part nº	Size	Nº directional valves	Flow (l/min)
PFNG102PLCL180 H	NG-10	2	120
PFNG103PLCL180 H	NG-10	3	120
PFNG104PLCL180 H	NG-10	4	120
PFNG105PLCL180 H	NG-10	5	120

***** Review attached PDF*****
Maximum flow: 120 l/min
Regulation rate: 20-250 bar
Legs included
Max pressure: 315 bar

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.