
Solenoid valves

Subplates for NG6

Parallel subplate for NG6 direct.valve with relief valve,by pass cavity,ins.valves,A & B side ports

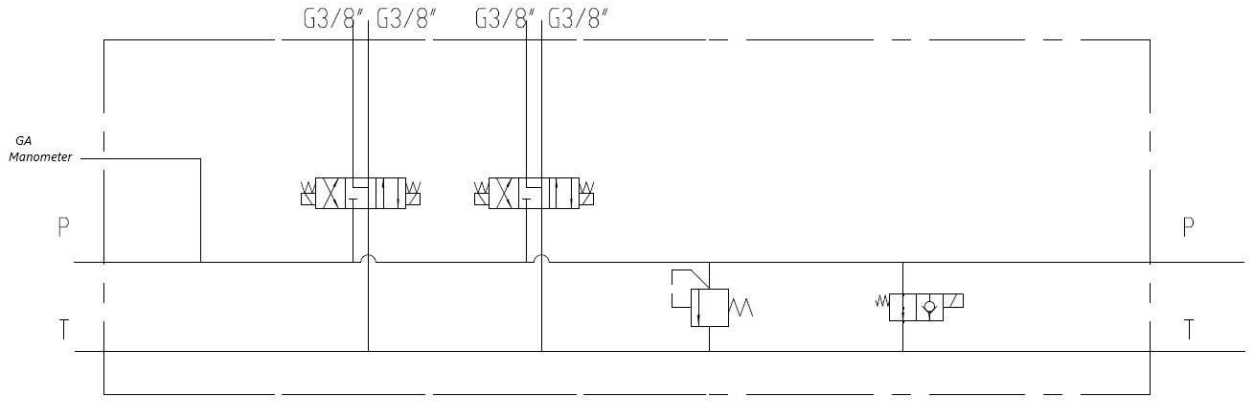

Venting Electric valve: VENA08 + BOF38 (depending of voltage)

Relief valve range: 50-250 Bar

Material: Steel

Part nº	R1	R2	Nº directional valves	Flow (l/min)
PV2PLCL180 H	3/8" BSP	1/2" BSP	2	40
PV3PLCL180 H	3/8" BSP	1/2" BSP	3	40
PV4PLCL180 H	3/8" BSP	1/2" BSP	4	40
PV5PLCL180 H	3/8" BSP	1/2" BSP	5	40
PV6PLCL180 H	3/8" BSP	1/2" BSP	6	40
PV7PLCL180 H	3/8" BSP	1/2" BSP	7	40
PV8PLCL180 H	3/8" BSP	1/2" BSP	8	40
PV9PLCL180 H	3/8" BSP	1/2" BSP	9	40
PV10PLCL180 H	3/8" BSP	1/2" BSP	10	40

***** Review attached PDF*****

the vent override plug is MC030 H-TD

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.