
Solenoid valves

Subplates for NG6

Parallel subplate for NG6 directional valve with relief valve, A & B side ports



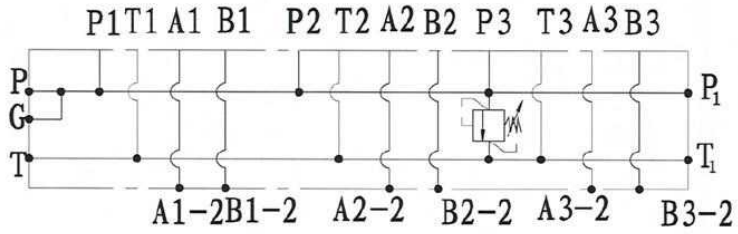

Body material: Steel

Part nº	R1	R2	Nº directional valves	Flow (l/min)
PF2PLCL180 H	1/2" BSP	3/8" BSP	2	40
PF3PLCL180 H	1/2" BSP	3/8" BSP	3	40
PF4PLCL180 H	1/2" BSP	3/8" BSP	4	40
PF5PLCL180 H	1/2" BSP	3/8" BSP	5	40
PF6PLCL180 H	1/2" BSP	3/8" BSP	6	40
PF7PLCL180 H	1/2" BSP	3/8" BSP	7	40
PF8PLCL180 H	1/2" BSP	3/8" BSP	8	40
PF9PLCL180 H	1/2" BSP	3/8" BSP	9	40
PF10PLCL180 H	1/2" BSP	3/8" BSP	10	40

***** Review attached PDF*****
Maximum flow: 40 L/min
Regulation rate: 20-250 bar
Lashing straps included

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.