
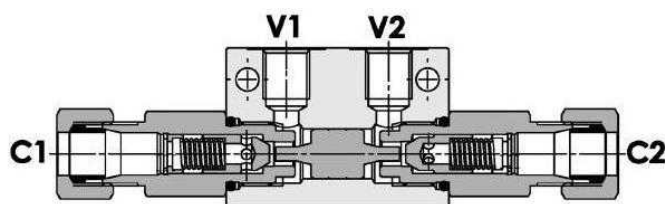



Pilot operated double check valve in block with banjo

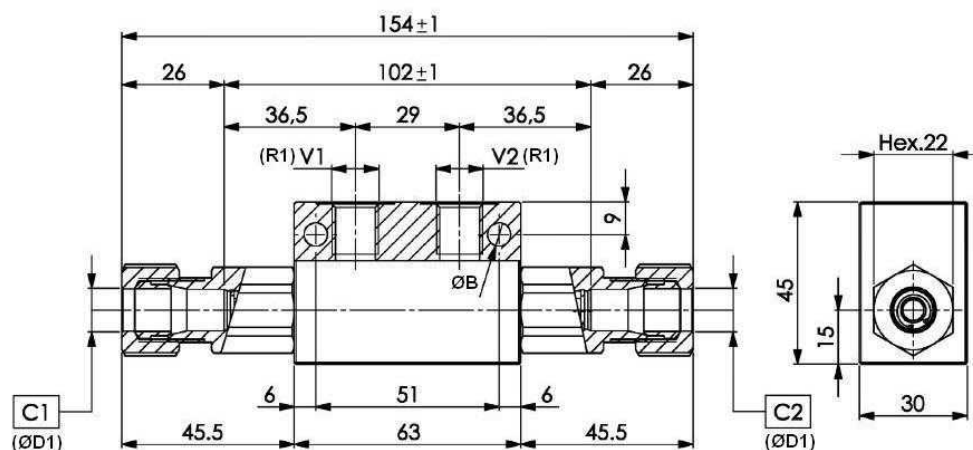

Material Zinc Plated Steel Body

Cracking Pressure 2 bar

FPD 1/4 1RO SR · C1: Tube Ø12
· C2: Female 1/4" BSP

Part n°	ØD1	R1	CONNECTION	Max. flow (l/min)	Max. Press. (bar)	Pilot ratio	ØB
FPD 1/4 1RO SR	12	1/4" BSP	1	12	250	1:4	6,5
FPD 1/4-2R0	12	1/4" BSP	2	12	250	1:4	6,5
FPD 3/8 20L 2RO SR	12	3/8" BSP	2	20	250	1:4	*

* Valve FPD 3/8 20L 2RO SR is supplied without fixing holes