

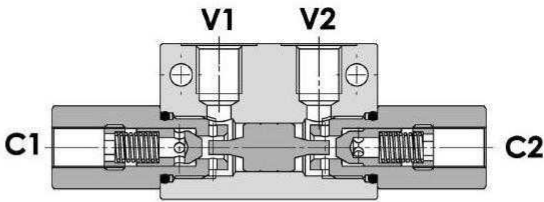


Pilot operated double check valves in block (in T)

1/1

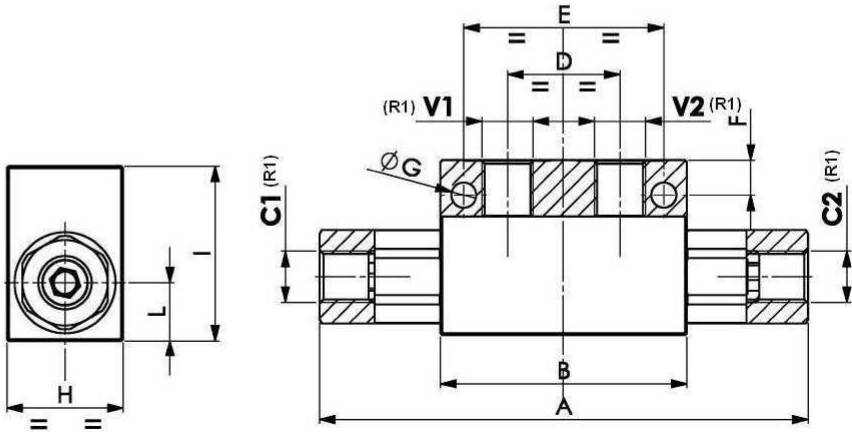

Material Body in Steel
 Cracking Pressure 2 bar

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	Pilot ratio	ØG	A	B	D	E	F	H	I	L
VSD 1/4	1/4" BSP	12	350	1:4	6.5	126	63.6	29	51.6	9	30	45	15
FPD 3/8-20 L	3/8" BSP	20	300	1:4	*	126	63,6	29	*	*	30	45	15
VSD 3/8-20 L	3/8" BSP	20	300	1:4	*	126	63.6	29	*	*	30	45	15
VSD 3/8	3/8" BSP	30	300	1:6	8	158	90	40	75	17	40	60	20
VSD 1/2	1/2" BSP	45	300	1:4	8	174	90	40	75	17	40	60	20
VSD 3/4	3/4" BSP	85	280	1:3.6	9	212	120	60	104	16	50	70	25

* Valve FPD 3/8-20L is supplied without fixing holes