


Piston pumps




Cast iron body

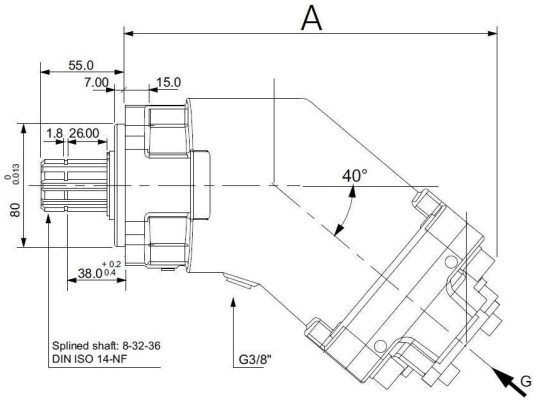

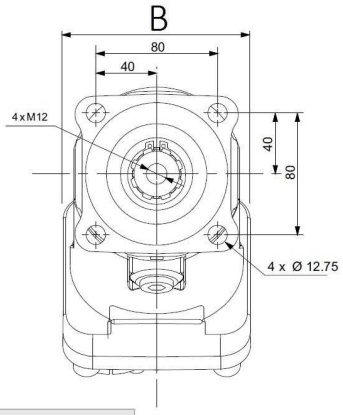





Part nº	R1	R2	Working Pressure (bar)	Max. Press. (bar)	Max. torque (N.m 350Bar)	Rotation speed (rpm)	cm³/ rev	A	B	C	ØX
BPT12	3/4" BSP	3/4"	380	420	76	2900	12	196.7	108	54	39
BPT18	3/4" BSP	3/4"	380	420	114	2900	18	196.7	108	54	39
BPT25	3/4" BSP	3/4"	380	420	159	2750	25	196.7	108	54	39
BPT32	3/4" BSP	3/4"	380	420	204	2700	32	202.8	108	54	39
BPT40	3/4" BSP	3/4"	380	420	261	2550	40	202.8	108	54	39
BPT50	3/4" BSP	3/4"	380	420	318	2450	50	214.4	108	54	51
BPT63	3/4" BSP	3/4"	380	420	401	2300	63	214.4	108	54	51
BPT80	1" BSP	1"	380	420	509	2150	80	241.7	122	60	64
BPT108	1" BSP	1"	380	420	687	1900	108	241.7	122	60	64
BPT130	1" BSP	1"	380	420	827	1750	130	244	122	60	64

***** Review attached PDF*****
Possibility to change the rotation of the pump following these instructions
For correct operation, the suction fitting that comes with the pump must be fitted.
Piston pumps operate at a minimum of 100 rpm

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.