






Plough Overturning Valve

1/2

VRA 60/80 S.E.

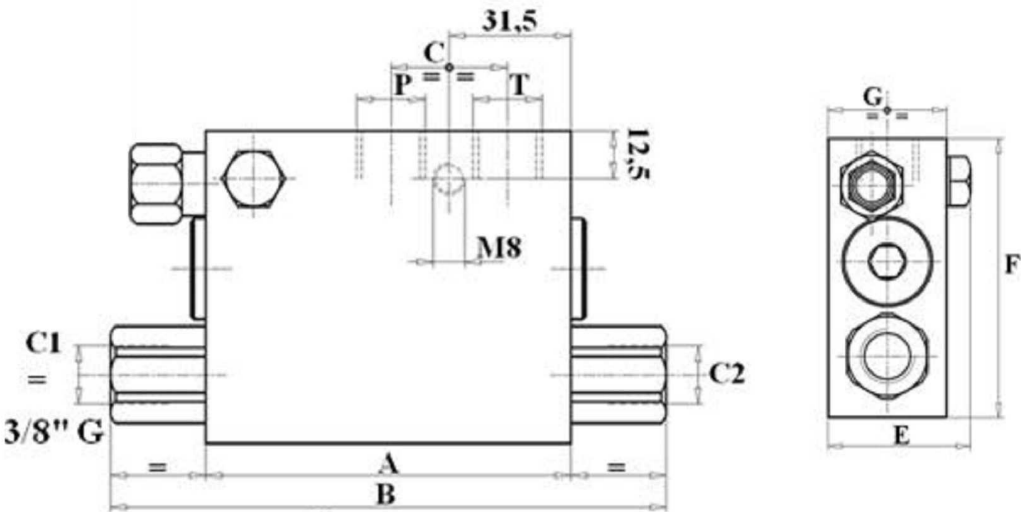

VRAP 80/100 D.E.

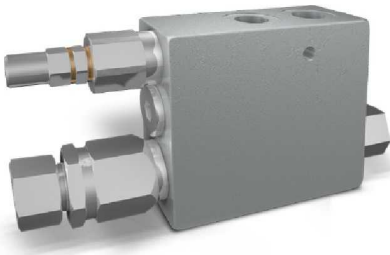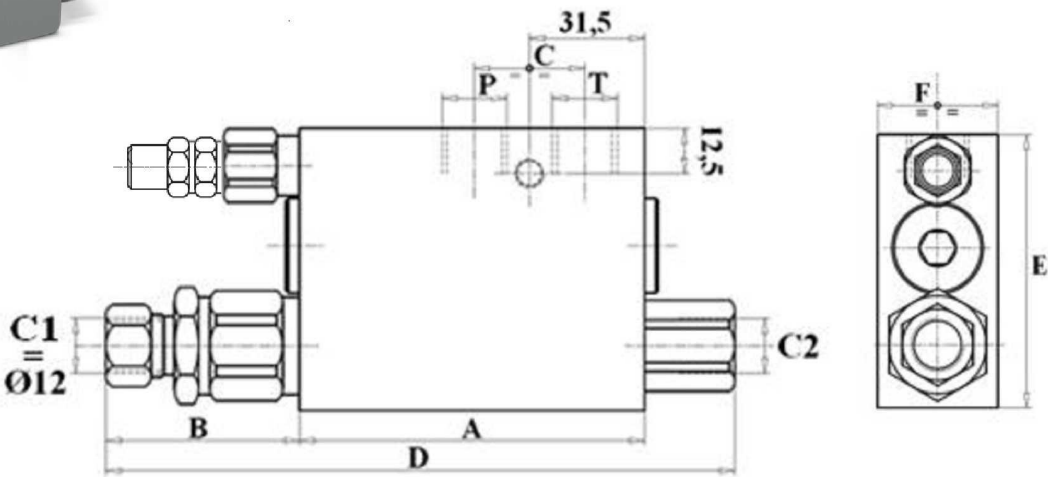

- VRA 60/80 S.E.** - Max. exchange pressure: 200 Bar
- VRAP 80/100 DE** - Max. exchange pressure: 250 Bar
- Material:** Body made of zinc-plated steel
- R1 = C2, P, T**

Part nº	R1	Cylinder with piston	Max. flow (l/min)	Max. Press. (bar)	A	B	C	D	E	F	G
VRA 60/80 S.E.	3/8" BSP	60-80mm	50	400	94	142	30	-	42	80	35

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSQ will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

Plough Overturning Valve

Part nº	R1	Cylinder with piston	Max. flow (l/min)	Max. Press. (bar)	A	B	C	D	E	F	G
VRAP 80/100 DE	3/8" BSP	80-100mm	90	400	94	58	30	176	80	35	