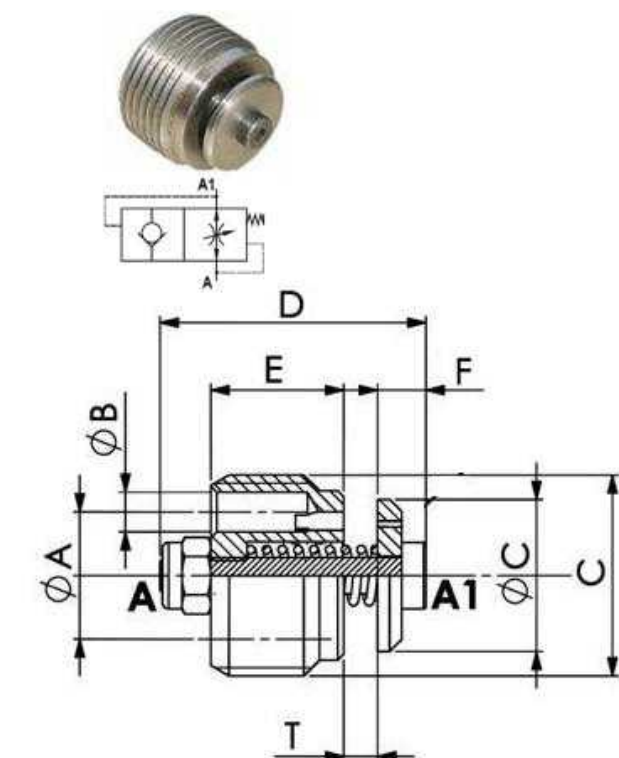
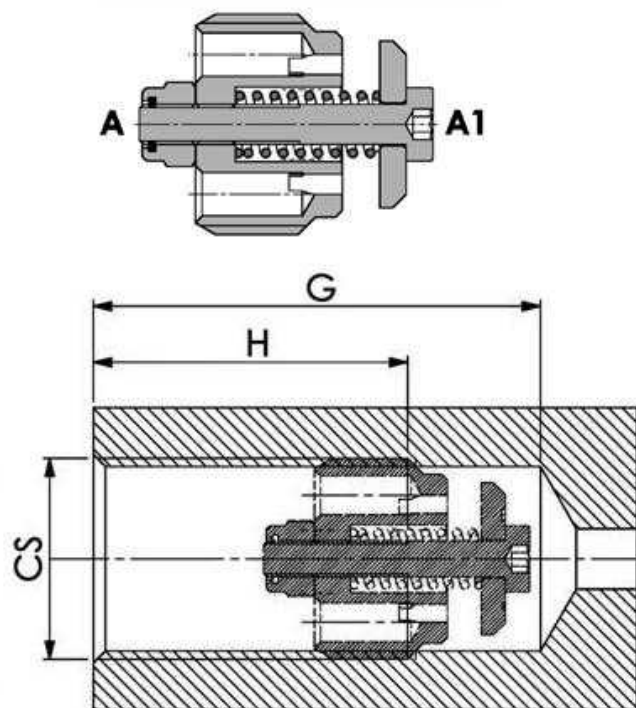
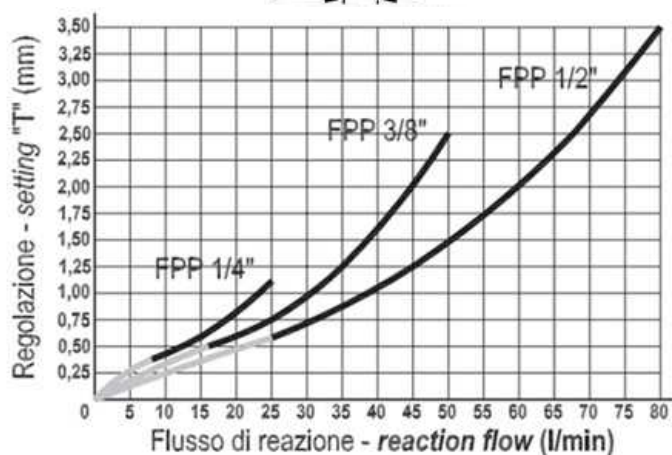
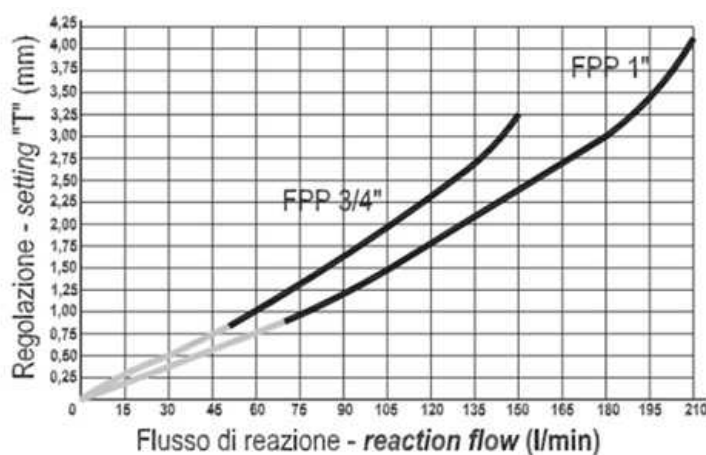


Plug-in hose break valve

— flusso di reazione raccomandato (min.-max.)
recommended flow reaction (min.-max.)

R1=C, CS

Materials: All components are steel made.

Part n°	R1	Max. flow (l/min)	Max. Press. (bar)	ØA	ØB	ØC	D	E	F	G	H
FPP 1/4	1/4" BSP	25	350	8,5	2,4	9,5	23	8	5	35	24
FPP 3/8	3/8" BSP	50	350	11	3,5	12,5	23	11	5	37	26
FPP 1/2	1/2" BSP	80	350	13	4,5	15	29	13	6	45	30

Plug-in hose break valve**2/2**

Part n°	R1	Max. flow (l/min)	Max. Press. (bar)	ØA	ØB	ØC	D	E	F	G	H
FPP 3/4	3/4" BSP	150	350	16	6	18,5	34	18	6	54	38
FPP 1	1" BSP	200	300	20	7	23	40	21	7,5	66	46