
Pneumatic cylinders D.A. ISO 15552 Ø125

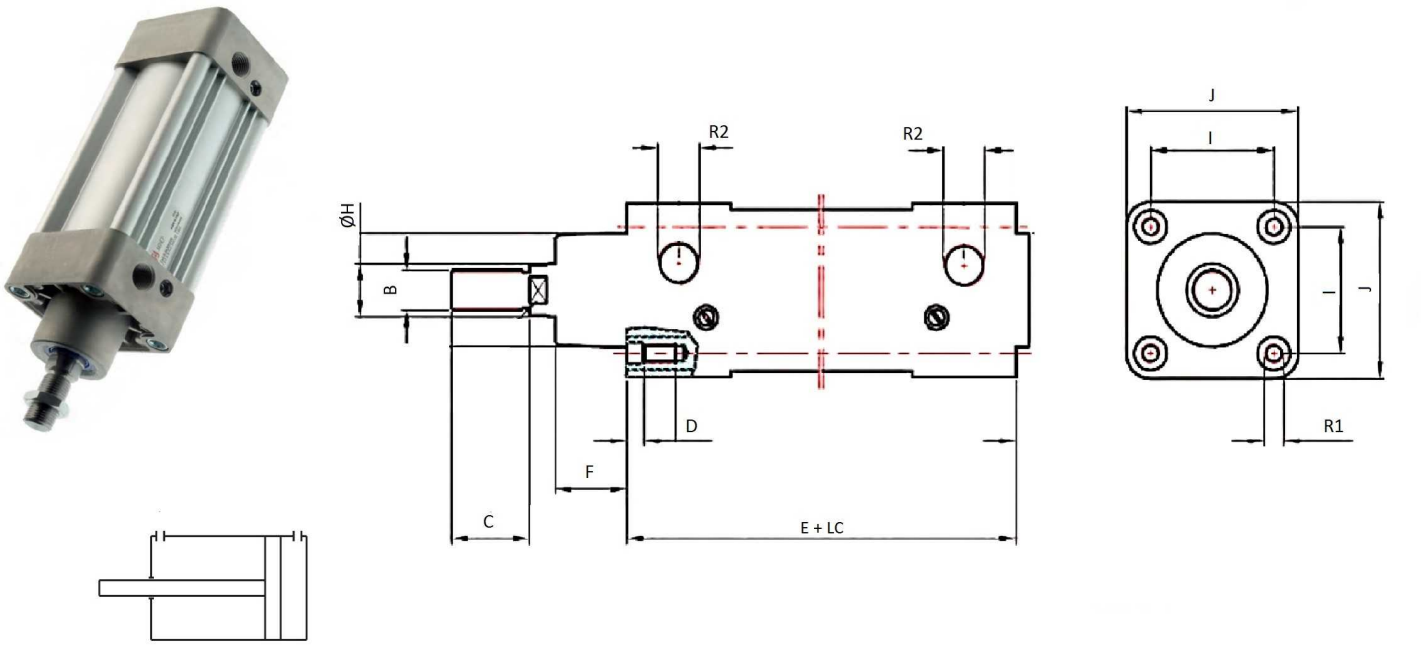

Shock absorption adjustable on both sides

Part nº	R1	R2	Stroke (mm)	ØH	B	C	D	E	F	G	I	J
CNM1250025	M12	1/2" BSP	25	32	M27x2	54	6	160	50	279	110	135
CNM1250050	M12	1/2" BSP	50	32	M27x2	54	6	160	50	279	110	135
CNM1250075	M12	1/2" BSP	75	32	M27x2	54	6	160	50	279	110	135
CNM1250080	M12	1/2" BSP	80	32	M27x2	54	6	160	50	279	110	135
CNM1250100	M12	1/2" BSP	100	32	M27x2	54	6	160	50	279	110	135
CNM1250125	M12	1/2" BSP	125	32	M27x2	54	6	160	50	279	110	135
CNM1250150	M12	1/2" BSP	150	32	M27x2	54	6	160	50	279	110	135
CNM1250160	M12	1/2" BSP	160	32	M27x2	54	6	160	50	279	110	135
CNM1250200	M12	1/2" BSP	200	32	M27x2	54	6	160	50	279	110	135
CNM1250250	M12	1/2" BSP	250	32	M27x2	54	6	160	50	279	110	135
CNM1250300	M12	1/2" BSP	300	32	M27x2	54	6	160	50	279	110	135
CNM1250320	M12	1/2" BSP	320	32	M27x2	54	6	160	50	279	110	135
CNM1250350	M12	1/2" BSP	350	32	M27x2	54	6	160	50	279	110	135
CNM1250450	M12	1/2" BSP	450	32	M27x2	54	6	160	50	279	110	135

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.