
Pneumatic cylinders D.A. ISO 15552 Ø160



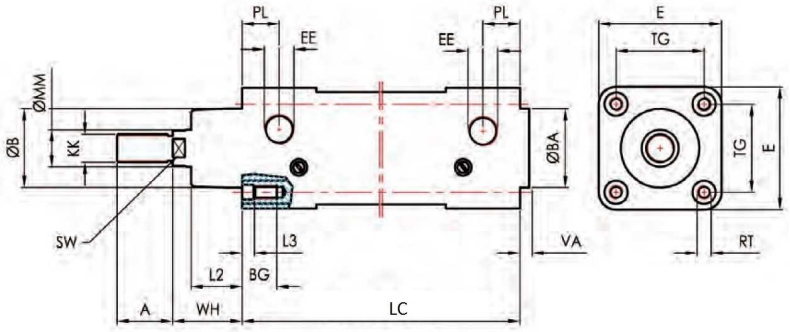

*LC = Stroke

Ø mm.	ØB d11	VA	L2	WH	ØMM	SW	KK	A	BG	RT	E	TG	EE	PL	L3	ZM
160	65	6	55	80	40	36	M36X2	72	24	M16	180	140	G3/4	29	0	340

Shock absorption adjustable on both sides

Part nº	R1	R2	Stroke (mm)
CNM1600025	M16	3/4" BSP	25
CNM1600080	M16	3/4" BSP	80
CNM1600100	M16	3/4" BSP	100
CNM1600125	M16	3/4" BSP	125
CNM1600160	M16	3/4" BSP	180

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.