
Pneumatic cylinders D.A. ISO 15552 Ø32

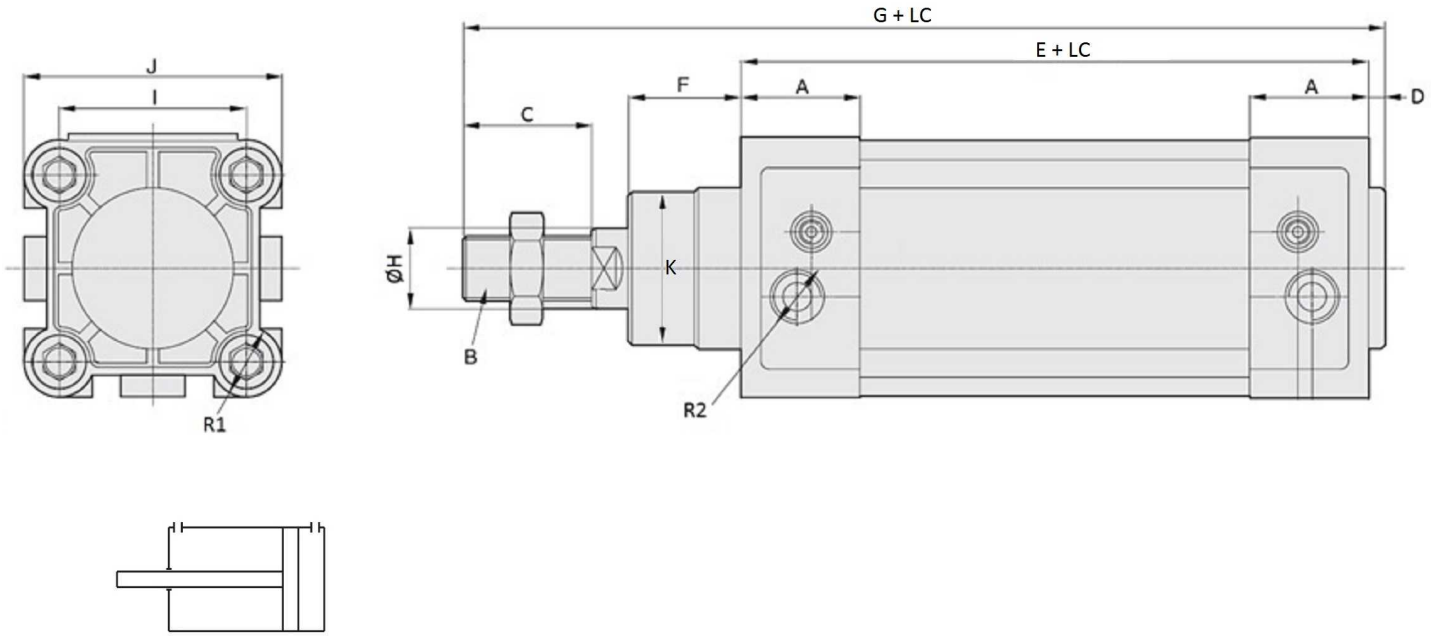

Shock absorption adjustable on both sides

Part nº	R1	R2	Stroke (mm)	ØH	A	B	C	D	E	F	G	I	J	K
CNM0320025	M6	1/8" BSP	25	12	25	M10x1,25	22	4	94	19	146	32,5	45	30
CNM0320050	M6	1/8" BSP	50	12	25	M10x1,25	22	4	94	19	146	32,5	45	30
CNM0320075	M6	1/8" BSP	75	12	25	M10x1,25	22	4	94	19	146	32,5	45	30
CNM0320080	M6	1/8" BSP	80	12	25	M10x1,25	22	4	94	19	146	32,5	45	30
CNM0320100	M6	1/8" BSP	100	12	25	M10x1,25	22	4	94	19	146	32,5	45	30
CNM0320150	M6	1/8" BSP	150	12	25	M10x1,25	22	4	94	19	146	32,5	45	30
CNM0320160	M6	1/8" BSP	160	12	25	M10x1,25	22	4	94	19	146	32,5	45	30
CNM0320200	M6	1/8" BSP	200	12	25	M10x1,25	22	4	94	19	146	32,5	45	30
CNM0320250	M6	1/8" BSP	250	12	25	M10x1,25	22	4	94	19	146	32,5	45	30
CNM0320300	M6	1/8" BSP	300	12	25	M10x1,25	22	4	94	19	146	32,5	45	30
CNM0320350	M6	1/8" BSP	350	12	25	M10x1,25	22	4	94	19	146	32,5	45	30
CNM0320400	M6	1/8" BSP	400	12	25	M10x1,25	22	4	94	19	146	32,5	45	30
CNM0320450	M6	1/8" BSP	450	12	25	M10x1,25	22	4	94	19	146	32,5	45	30
CNM0320500	M6	1/8" BSP	500	12	25	M10x1,25	22	4	94	19	146	32,5	45	30

Stroke = LC = stroke length

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.