
Pneumatic cylinders and accessories ISO 15552

Pneumatic cylinders D.A. ISO 15552

Pneumatic cylinders D.A. ISO 15552 Ø40

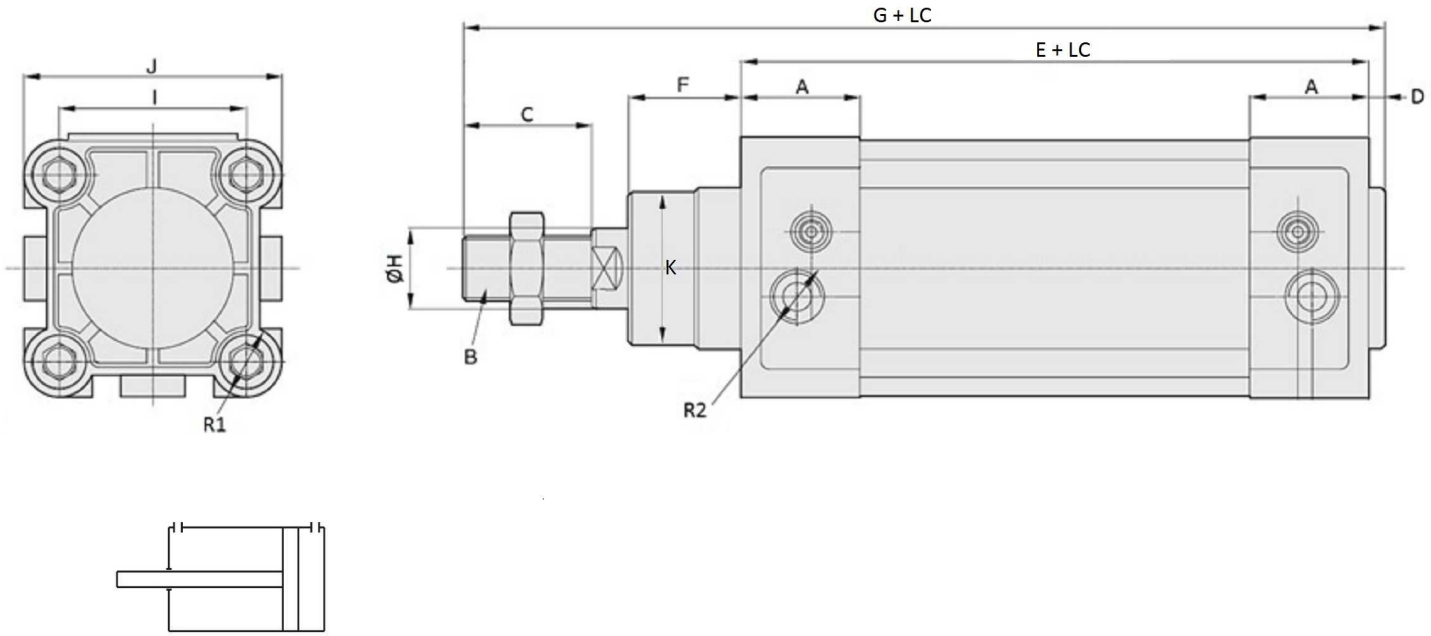

Shock absorption adjustable on both sides

Part nº	R1	R2	Stroke (mm)	ØH	A	B	C	D	E	F	G	I	J	K
CNM0400025	M6	1/4" BSP	25	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400050	M6	1/4" BSP	50	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400075	M6	1/4" BSP	75	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400100	M6	1/4" BSP	100	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400125	M6	1/4" BSP	125	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400150	M6	1/4" BSP	150	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400160	M6	1/4" BSP	160	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400200	M6	1/4" BSP	200	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400250	M6	1/4" BSP	250	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400300	M6	1/4" BSP	300	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400320	M6	1/4" BSP	320	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400350	M6	1/4" BSP	350	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400400	M6	1/4" BSP	400	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400450	M6	1/4" BSP	450	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35
CNM0400500	M6	1/4" BSP	500	16	21.5	M12x1,25	24	4	105	21.5	163	38	54	35

Stroke = LC = stroke length

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.