
Pneumatic cylinders and accessories ISO 15552

Pneumatic cylinders D.A. ISO 15552

Pneumatic cylinders D.A. ISO 15552 Ø50

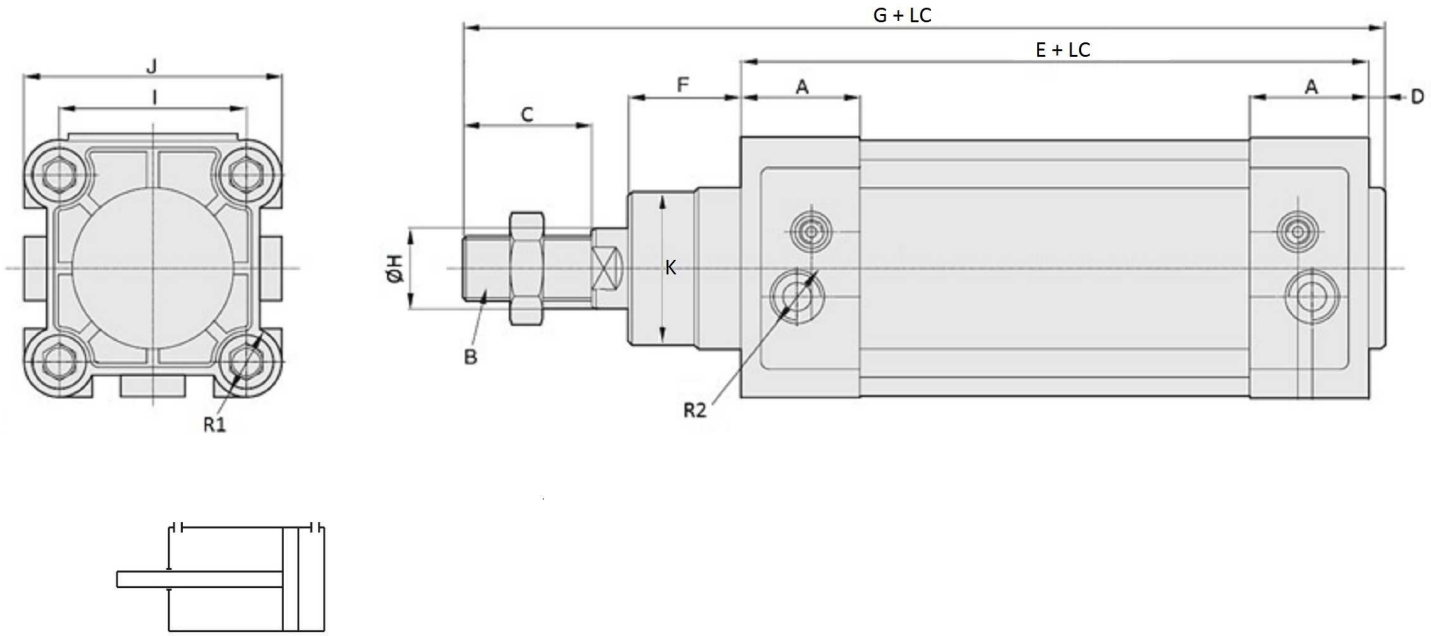

Shock absorption adjustable on both sides

Part nº	R1	R2	Stroke (mm)	ØH	A	B	C	D	E	F	G	I	J	K
CNM0500025	M8	1/4" BSP	25	20	29.5	M16X1,50	32	4	106	28	179	46,5	64	40
CNM0500050	M8	1/4" BSP	50	20	29.5	M16X1,50	32	4	106	28	179	46,5	64	40
CNM0500075	M8	1/4" BSP	75	20	29.5	M16X1,50	32	4	106	28	179	46,5	64	40
CNM0500100	M8	1/4" BSP	100	20	29.5	M16X1,50	32	4	106	28	179	46,5	64	40
CNM0500125	M8	1/4" BSP	125	20	29.5	M16X1,50	32	4	106	28	179	46,5	64	40
CNM0500150	M8	1/4" BSP	150	20	29.5	M16X1,50	32	4	106	28	179	46,5	64	40
CNM0500160	M8	1/4" BSP	160	20	29.5	M16X1,50	32	4	106	28	179	46,5	64	40
CNM0500200	M8	1/4" BSP	200	20	29.5	M16X1,50	32	4	106	28	179	46,5	64	40
CNM0500250	M8	1/4" BSP	250	20	29.5	M16X1,50	32	4	106	28	179	46,5	64	40
CNM0500300	M8	1/4" BSP	300	20	29.5	M16X1,50	32	4	106	28	179	46,5	64	40
CNM0500320	M8	1/4" BSP	320	20	29.5	M16X1,50	32	4	106	28	179	46,5	64	40
CNM0500350	M8	1/4" BSP	350	20	29.5	M16X1,50	32	4	106	28	179	46,5	64	40
CNM0500400	M8	1/4" BSP	400	20	29.5	M16X1,50	32	4	106	28	179	46,5	64	40

Stroke = LC = stroke length

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.