
Pneumatic cylinders D.A. ISO 15552 Ø63

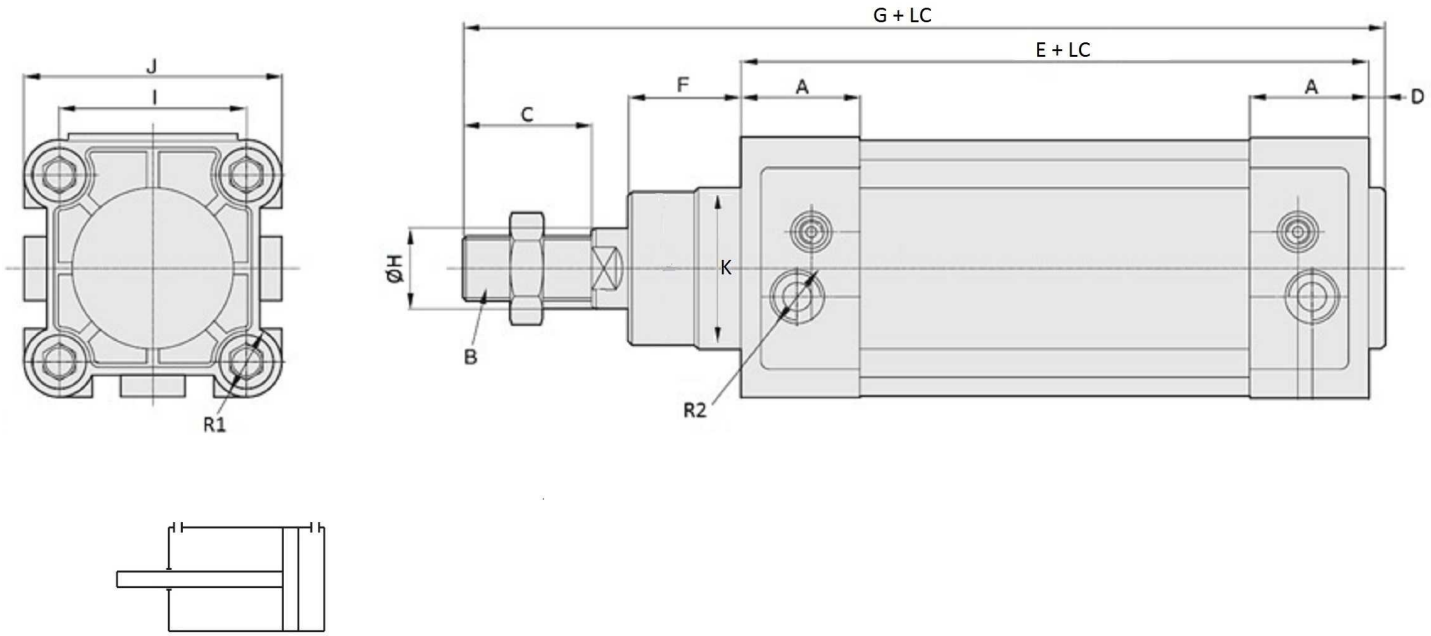

Shock absorption adjustable on both sides

Part nº	R1	R2	Stroke (mm)	ØH	A	B	C	D	E	F	G	I	J	K
CNM0630025	M8	3/8" BSP	25	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630050	M8	3/8" BSP	50	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630075	M8	3/8" BSP	75	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630100	M8	3/8" BSP	100	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630125	M8	3/8" BSP	125	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630150	M8	3/8" BSP	150	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630160	M8	3/8" BSP	160	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630200	M8	3/8" BSP	200	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630250	M8	3/8" BSP	250	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630300	M8	3/8" BSP	300	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630320	M8	3/8" BSP	320	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630350	M8	3/8" BSP	350	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630400	M8	3/8" BSP	400	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630450	M8	3/8" BSP	450	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45
CNM0630500	M8	3/8" BSP	500	20	35.5	M16x1,5	32	4	121	28.5	194	56,5	75	45

Stroke = LC = stroke length

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.