
Pneumatic cylinders D.A. ISO 15552 Ø80

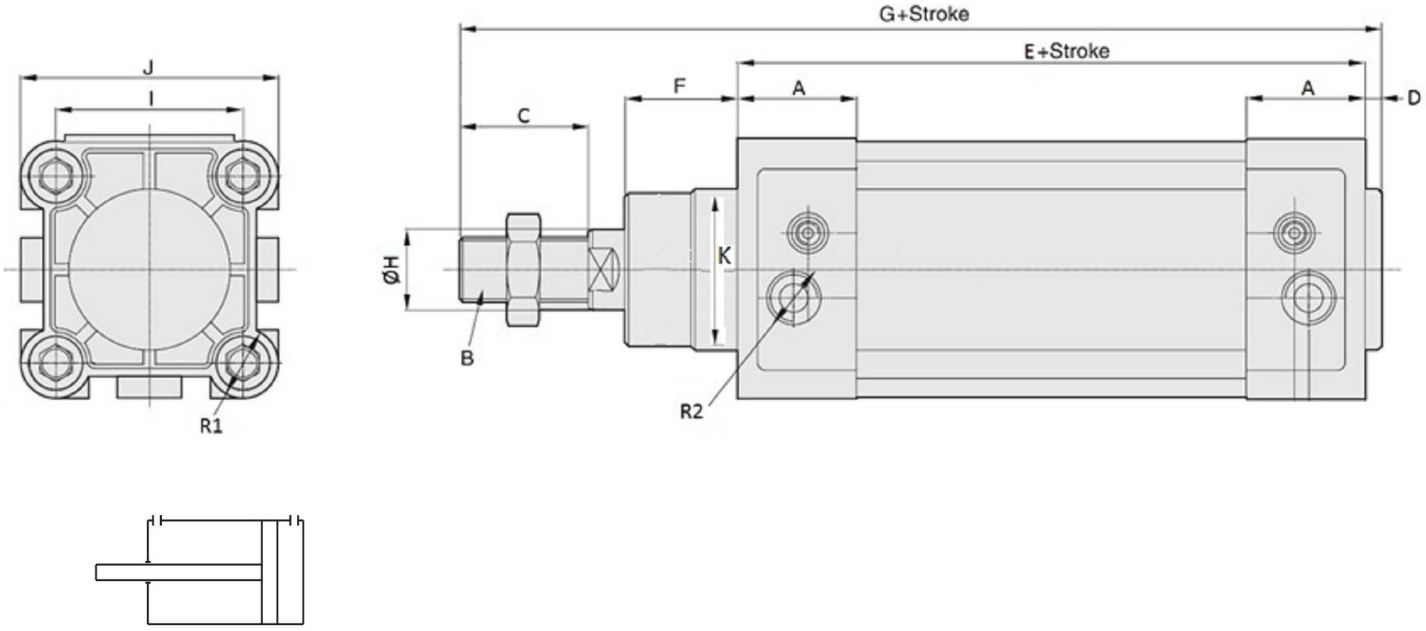

Shock absorption adjustable on both sides

Part nº	R1	R2	Stroke (mm)	ØH	A	B	C	D	E	F	G	I	J	K
CNM0800025	M10	3/8" BSP	25	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800075	M10	3/8" BSP	75	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800080	M10	3/8" BSP	80	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800100	M10	3/8" BSP	100	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800125	M10	3/8" BSP	125	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800150	M10	3/8" BSP	150	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800160	M10	3/8" BSP	160	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800200	M10	3/8" BSP	200	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800250	M10	3/8" BSP	250	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800300	M10	3/8" BSP	300	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800320	M10	3/8" BSP	320	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800350	M10	3/8" BSP	350	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800400	M10	3/8" BSP	400	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800450	M10	3/8" BSP	450	25	36	M20x1,5	40	4	128	34.7	218	72	93	45
CNM0800500	M10	3/8" BSP	500	25	36	M20x1,5	40	4	128	34.7	218	72	93	45

Stroke = LC = stroke length

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.