
Hydraulic valves

Valves for manometers

Pressure Gauge Protector (in-line) FM-SF 90º

Mild Steel



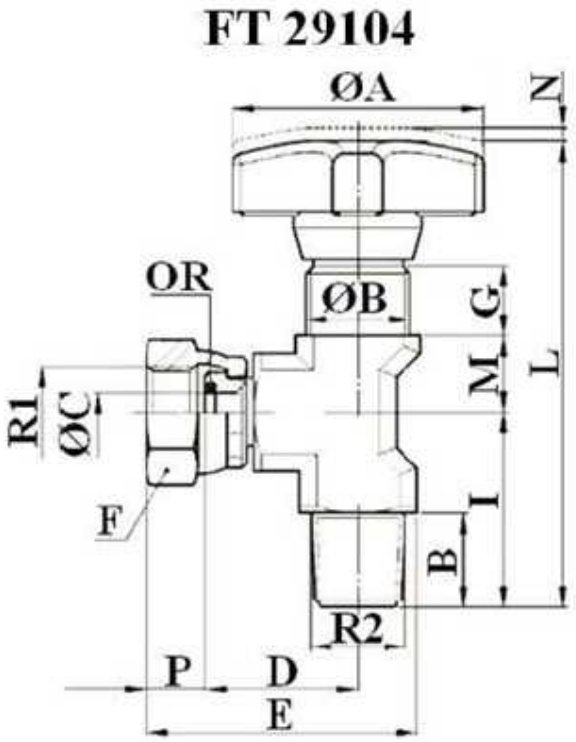

Thread: R1=BSP; R2=BSPT

OR: 2018

Characteristics: FT29004=STRAIGHT; FT29104=90º

Image: F=18; N=2

Materials: Body-9 S Mn Pb 23 - UNI 5105 - press forg.
Needle-35 S Mn Pb 23 - UNI 5105-burnished
OR-Nitrile
Antiextrusion ring-PTFE
Handwheel-Nylon 66

Temperature: from -20ºC to +100ºC

Part nº	R1	R2	Max. Press. (bar)	L	ØA	ØB	ØC	B	D	E	G	I	M	P
FT29104	1/4" BSP	1/4" BSPT	350	66	34	M15X1	5,6	13,5	22	40	10	28	11	8,5

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.